

BALDOR® • RELIANCE

Product Information Packet

M1719

.75/.33HP, 1735/1160RPM, 3PH, 60HZ, 56, 3517M

Copyright © All product information within this document is subject to Baldor Electric Company copyright © protection, unless otherwise noted.

Part Detail							
Revision:	J	Status:	PRD/A	Change #:		Proprietary:	No
Type:	AC	Prod. Type:	3517M	Elec. Spec:	35WGP584	CD Diagram:	
Enclosure:	TEFC	Mfg Plant:		Mech. Spec:	35A011	Layout:	
Frame:	56	Mounting:	F1	Poles:	04/06	Created Date:	05-01-2007
Base:	RG	Rotation:	R	Insulation:	F	Eff. Date:	07-29-2011
Leads:	6#18	Literature:		Elec. Diagram:		Replaced By:	

Nameplate NP1256L									
CAT.NO.	M1719								
SPEC.	35A011P584								
HP	.75/.33								
VOLTS	460								
AMP	1.39/.84								
RPM	1740/1165								
FRAME	56	HZ	60	PH	3				
SER.F.	1.25	CODE	L	DES	-	CLASS	F		
NEMA-NOM-EFF			PF						
RATING	40C AMB-CONT								
CC			USABLE AT 208V						
DE	6205	ODE	6203						
ENCL	TEFC	SN							
	SFA 1.55/.9								

Parts List		
Part Number	Description	Quantity
SA156935	SA 35A011P584	1.000 EA
RA145637	RA 35A011P584	1.000 EA
35FN3002A05SP	EXFN, PLASTIC, 6.376 OD, .638 ID	1.000 EA
NS2512A01	INSULATOR, CONDUIT BOX X	1.000 EA
35CB3007	35 CB CASTING W/.88 DIA. LEAD HOLE	1.000 EA
36GS1000SP	GASKET-CONDUIT BOX, .06 THICK #SV-330 LE	1.000 EA
51XB1016A07	10-16 X 7/16 HXWSSLD SERTYB	2.000 EA
11XW1032G06	10-32 X .38, TAPTITE II, HEX WSHR SLTD U	1.000 EA
35EP3100M02	FREP TEFC 203 BRG W/O GRSR (RAISED FH MT	1.000 EA
HW5100A03SP	WAVY WASHER (W1543-017)	1.000 EA
35EP3101A02SP	STD PU ENDPLATE-ENCL-205 BRG LESS GREASE	1.000 EA
XY1032A02	10-32 HEX NUT DIRECTIONAL SERRATION	4.000 EA
51XB1214A16	12-14X1.00 HXWSSLD SERTYB	1.000 EA
35FH4005A32SP	IEC FH NO GRSR W/3 HOLES - W/AUTOPHERETI	1.000 EA
51XW1032A06	10-32 X .38, TAPTITE II, HEX WSHR SLTD S	3.000 EA
35CB4521GX	CONDUIT BOX LID KIT	1.000 EA
51XW0832A07	8-32 X .44, TAPTITE II, HEX WSHR SLTD SE	4.000 EA
HW2501D13SP	KEY, 3/16 SQ X 1.375	1.000 EA
HA7000A04	KEY RETAINER 0.625 DIA SHAFTS	1.000 EA
85XU0407S04	4X1/4 U DRIVE PIN STAINLESS	2.000 EA
MJ1000A75	GREASE, POLYREX EM EXXON	0.050 LB
MG1000G27	PAINT- S9282E CHARCOAL GREY	0.017 GA
HA3100A15	THRUBOLT 10-32 X 8.375	4.000 EA
LB1119	WARNING LABEL	1.000 EA

Parts List (continued)		
Part Number	Description	Quantity
LB1125C01	STD (STOCK) CARTON LABEL BALDOR WITH FLA	1.000 EA
LC0013	CONNECTION LABEL	1.000 EA
NP1256L	ALUM UL CSA CC	1.000 EA
PA1000	PACKING GROUP 3500 SHORT	1.000 EA


Accessories		
Part Number	Description	Multiplier
35-8762	C FACE KIT	A8
35EP1506A01SP	D-FLANGE KIT	A8

Performance Data at 460V, 60Hz, 0.75HP (Typical performance - Not guaranteed values)

General Characteristics			
Full Load Torque:	2.25 LB-FT	Start Configuration:	DOL
No-Load Current:	1.12 Amps	Break-Down Torque:	8.6 LB-FT
Line-line Res. @ 25°C.:	30.8 Ohms A Ph / 0.0 Ohms B Ph	Pull-Up Torque:	5.39 LB-FT
Temp. Rise @ Rated Load:	55 C	Locked-Rotor Torque:	6.2 LB-FT
Temp. Rise @ S.F. Load:	67 C	Starting Current:	8.59 Amps

Load Characteristics							
% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor:	30.0	45.0	57.0	67.0	75.0	82.0	75.0
Efficiency:	51.6	67.0	72.7	75.0	75.7	74.8	75.7
Speed:	1786.2	1772.3	1758.0	1742.7	1724.6	1699.6	1725.0
Line Amperes:	1.13	1.18	1.27	1.39	1.55	1.79	1.55

Performance Graph at 460V, 60Hz, 0.75HP Typical performance - Not guaranteed values

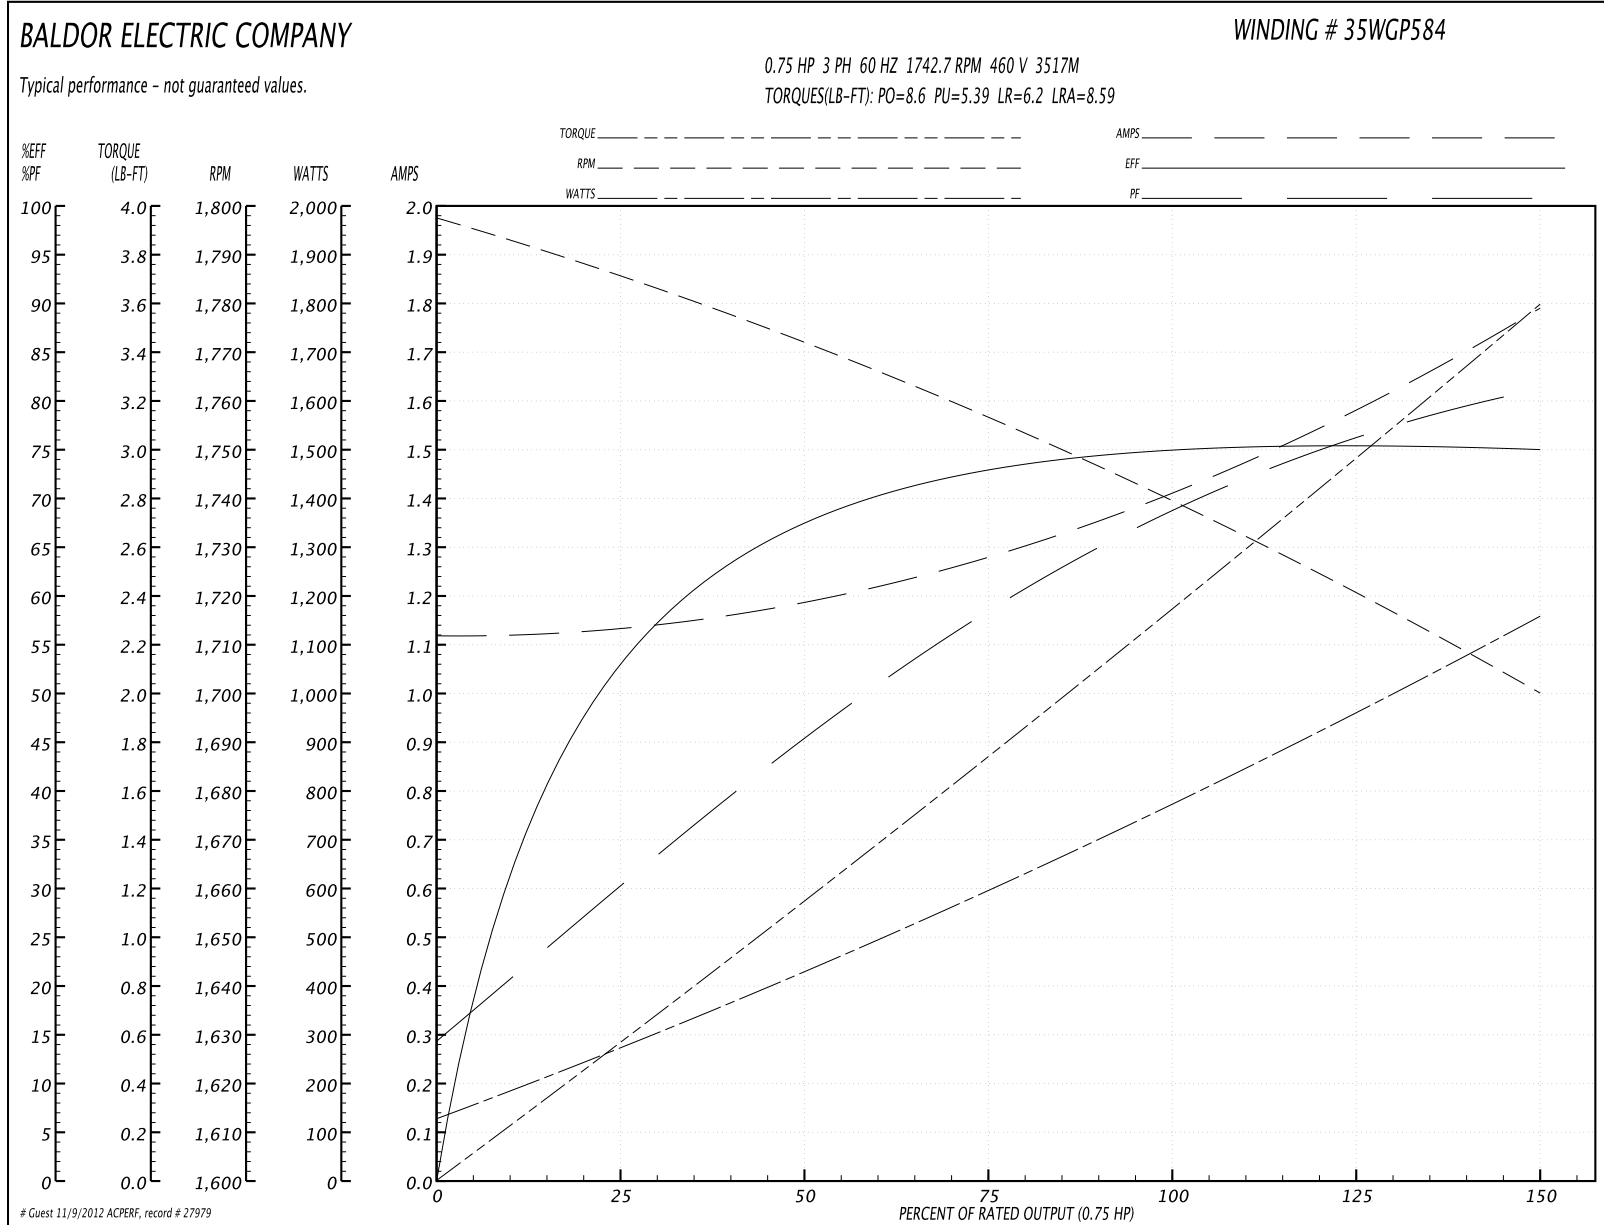

Performance Data at 460V, 60Hz, 0.33HP (Typical performance - Not guaranteed values)

General Characteristics			
Full Load Torque:	1.48 LB-FT	Start Configuration:	DOL
No-Load Current:	0.758 Amps	Break-Down Torque:	5.09 LB-FT
Line-line Res. @ 25°C.:	86.4 Ohms A Ph / 0.0 Ohms B Ph	Pull-Up Torque:	3.05 LB-FT
Temp. Rise @ Rated Load:	50 C	Locked-Rotor Torque:	3.3 LB-FT
Temp. Rise @ S.F. Load:	58 C	Starting Current:	3.65 Amps

Load Characteristics							
% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor:	29.0	39.0	49.0	58.0	66.0	74.0	66.0
Efficiency:	35.8	51.0	59.2	63.2	65.2	65.4	65.2
Speed:	1191.5	1183.3	1174.5	1164.5	1152.4	1136.5	1152.0
Line Amperes:	0.756	0.769	0.795	0.839	0.895	0.986	0.895

Performance Graph at 460V, 60Hz, 0.33HP Typical performance - Not guaranteed values

