

# **BALDOR® • RELIANCE**

## **Product Information Packet**

# **UCM713**

**7.5-10HP,3450RPM,3PH,60HZ,184TZ,3646M**

Copyright © All product information within this document is subject to Baldor Electric Company copyright © protection, unless otherwise noted.

Part Detail							
Revision:	AF	Status:	PRD/A	Change #:		Proprietary:	No
Type:	AC	Prod. Type:	3646M	Elec. Spec:	36WG0738	CD Diagram:	
Enclosure:	OPEN	Mfg Plant:		Mech. Spec:	36F551	Layout:	
Frame:	184TZ	Mounting:	F1	Poles:	02	Created Date:	
Base:	RG	Rotation:	R	Insulation:	B	Eff. Date:	02-26-2010
Leads:	9#14 30" LG	Literature:	Y	Elec. Diagram:		Replaced By:	

**Nameplate NP1279L**

CAT.NO.	UCM713						
SPEC.	36F551-738						
HP	7.5-10 AIR OVER						
VOLTS	208-230/460						
AMP	25-24/12						
RPM	3450						
FRAME	184TZ	HZ	60	PH	3		
SER.F.	1.00	CODE	J	DES	B	CL	B
NEMA-NOM-EFF	84	PF	92				
RATING	40C AMB-CONT						
CC				USABLE AT 208V	25		
DE	6206	ODE	6205				
ENCL	OPEN	SN					

Nameplate NP1263L									
CAT.NO.	UCM713								
SPEC.	36F551-738								
HP	7.5-10 AIR OVER								
VOLTS	208-230/460								
AMP	25-24/12								
RPM	3450								
FRAME	184TZ	HZ	60	PH	3				
SER.F.	1.00	CODE	J	DES	B	CL	B		
NEMA-NOM-EFF	84	PF	92						
RATING	40C AMB-CONT								
CC	USABLE AT 208V		25						
DE	6206	ODE	6205						
ENCL	OPEN	SN							

Parts List		
Part Number	Description	Quantity
SA035086	SA 36F551-738	1.000 EA
RA031113	RA 36F551-738	1.000 EA
HA6011A01	ADAPTOR, MACH	1.000 EA
51XF2520A08	SCREW, HEX SER SLT HD, ZN 1/4-20 X .50 L	2.000 EA
11XW1032G06	10-32 X .38, TAPTITE II, HEX WSHR SLTD U	1.000 EA
HW3001B01	003SS CUP WASHER, FOR #8 SCREW	1.000 EA
36EP3200A06	FR ENDPLATE, MACH	1.000 EA
HW4500A19	1/4-28X1/4 SLOTTED PLUG F/S	2.000 EA
HA1103A08	RODENT SCREEN, 36 FRAME, OPEN, FRONT END	1.000 EA
51XW1032A06	10-32 X .38, TAPTITE II, HEX WSHR SLTD S	4.000 EA
HW1000A10	#10 FLAT WASHER (SAE)	4.000 EA
HW5100A05	WVY WSHR F/205 & 304 BRGS	1.000 EA
36EP3201A03	FR/PU ENDPLATE, MACH	1.000 EA
HW4500A19	1/4-28X1/4 SLOTTED PLUG F/S	2.000 EA
HA1103A10	RODENT SCREEN, 36 FRAME, OPEN, PULLEY EN	1.000 EA
51XW1032A06	10-32 X .38, TAPTITE II, HEX WSHR SLTD S	4.000 EA
HW1000A10	#10 FLAT WASHER (SAE)	4.000 EA
10XN2520A20	1/4-20X 1 1/4 HEX HD X	2.000 EA
HW1001A25	LOCKWASHER 1/4, ZINC PLT .493 OD, .255 I	2.000 EA
XY2520A12	1/4-20 HEX NUT, DIRECTIONAL SERRATIONS	4.000 EA
HW2501E18	KEY, 1/4 SQ X 2.000	1.000 EA
HA7000A02	KEY RETAINER RING, 1 1/8 DIA, 1 3/8 DIA	1.000 EA
85XU0407S04	4X1/4 U DRIVE PIN STAINLESS	2.000 EA
HW3200A01	3/8-16X3/4 I-BLT WELDED F/S	1.000 EA


Parts List (continued)		
Part Number	Description	Quantity
MJ1000A75	GREASE, POLYREX EM EXXON	0.050 LB
MG1025C02	PAINT, 787.105 LITE TAN EPOXY (USE W/MG1	0.022 GA
LB1115	LABEL,LIFTING DEVICE	1.000 EA
MG1025Z20	ACTIVATOR WILKOFAS 060.32	0.010 GA
LB1001	LABEL, GREASE-EXXON POLYREX EM	1.000 EA
LD5000A23	LEAD ASSY, ML1400DF10 W/#10 RING 12"	1.000 EA
HA3101A28	THRUBOLT 1/4-20 X 12.500 OHIO ROD	4.000 EA
LB1119	WARNING LABEL	1.000 EA
LB1125C01	STD (STOCK) CARTON LABEL BALDOR WITH FLA	1.000 EA
LC0145B01	CONNECTION LABEL	1.000 EA
NP1279L	ALUM FARM DUTY UL CSA CC	1.000 EA
NP1263L	AUX, GP, ALUM, CC, LASER ETCHED	1.000 EA
36PA1000	PACK GROUP W/LB5001	1.000 EA

Accessories		
Part Number	Description	Multiplier
36-3403	C FACE KIT	A8
36EP1405A09SP	D-FLANGE KIT	A8


**Performance Data at 460V, 60Hz, 10.0HP (Typical performance - Not guaranteed values)**

General Characteristics							
Full Load Torque:	15.0 LB-FT			Start Configuration:	DOL		
No-Load Current:	3.0 Amps			Break-Down Torque:	58.0 LB-FT		
Line-line Res. @ 25°C.:	1.41 Ohms A Ph / 0.0 Ohms B Ph			Pull-Up Torque:	50.0 LB-FT		
Temp. Rise @ Rated Load:				Locked-Rotor Torque:	56.0 LB-FT		
Temp. Rise @ S.F. Load:				Starting Current:	100.0 Amps		
Load Characteristics							
% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor:	67.0	86.0	92.0	94.0	93.0	93.0	0.0
Efficiency:	75.7	86.3	84.0	82.8	82.5	79.8	0.0
Speed:	3567.0	3541.0	3511.0	3475.0	3440.0	3398.0	0.0
Line Amperes:	4.7	6.4	9.1	12.0	15.0	18.3	0.0

Performance Graph at 460V, 60Hz, 10.0HP Typical performance - Not guaranteed values

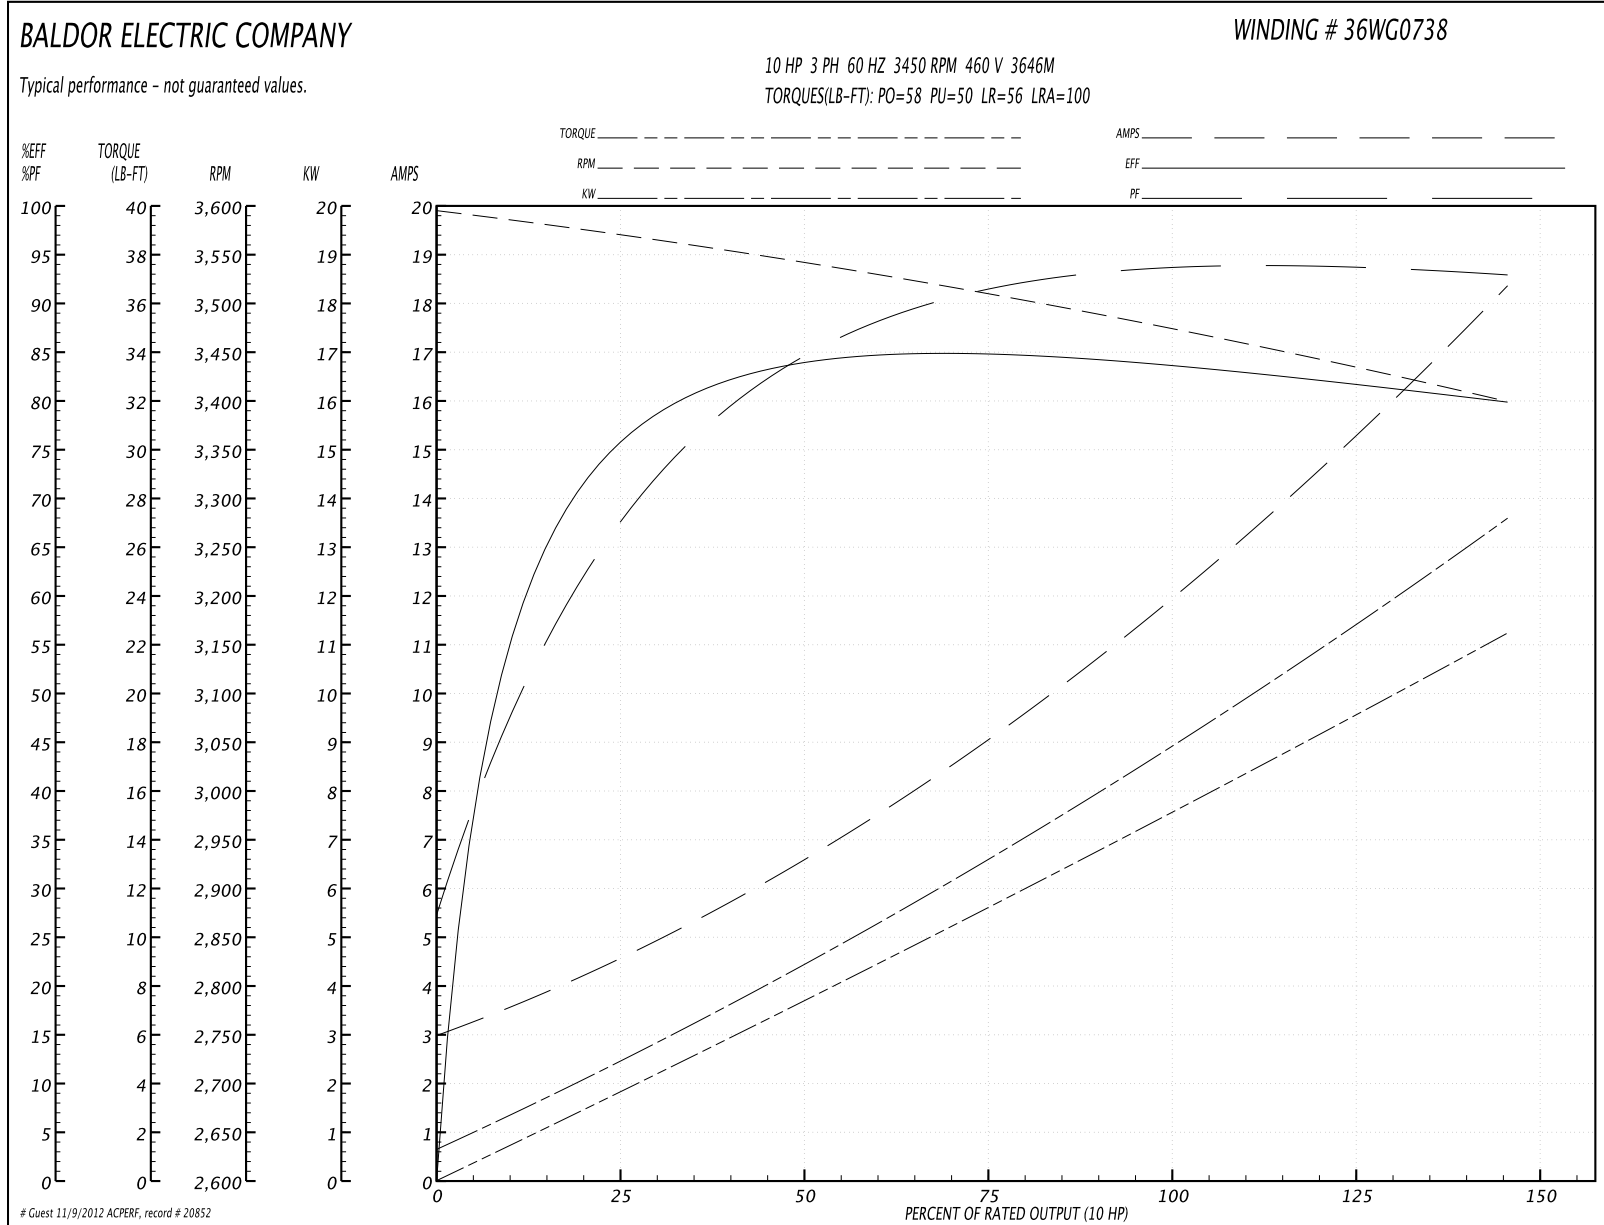



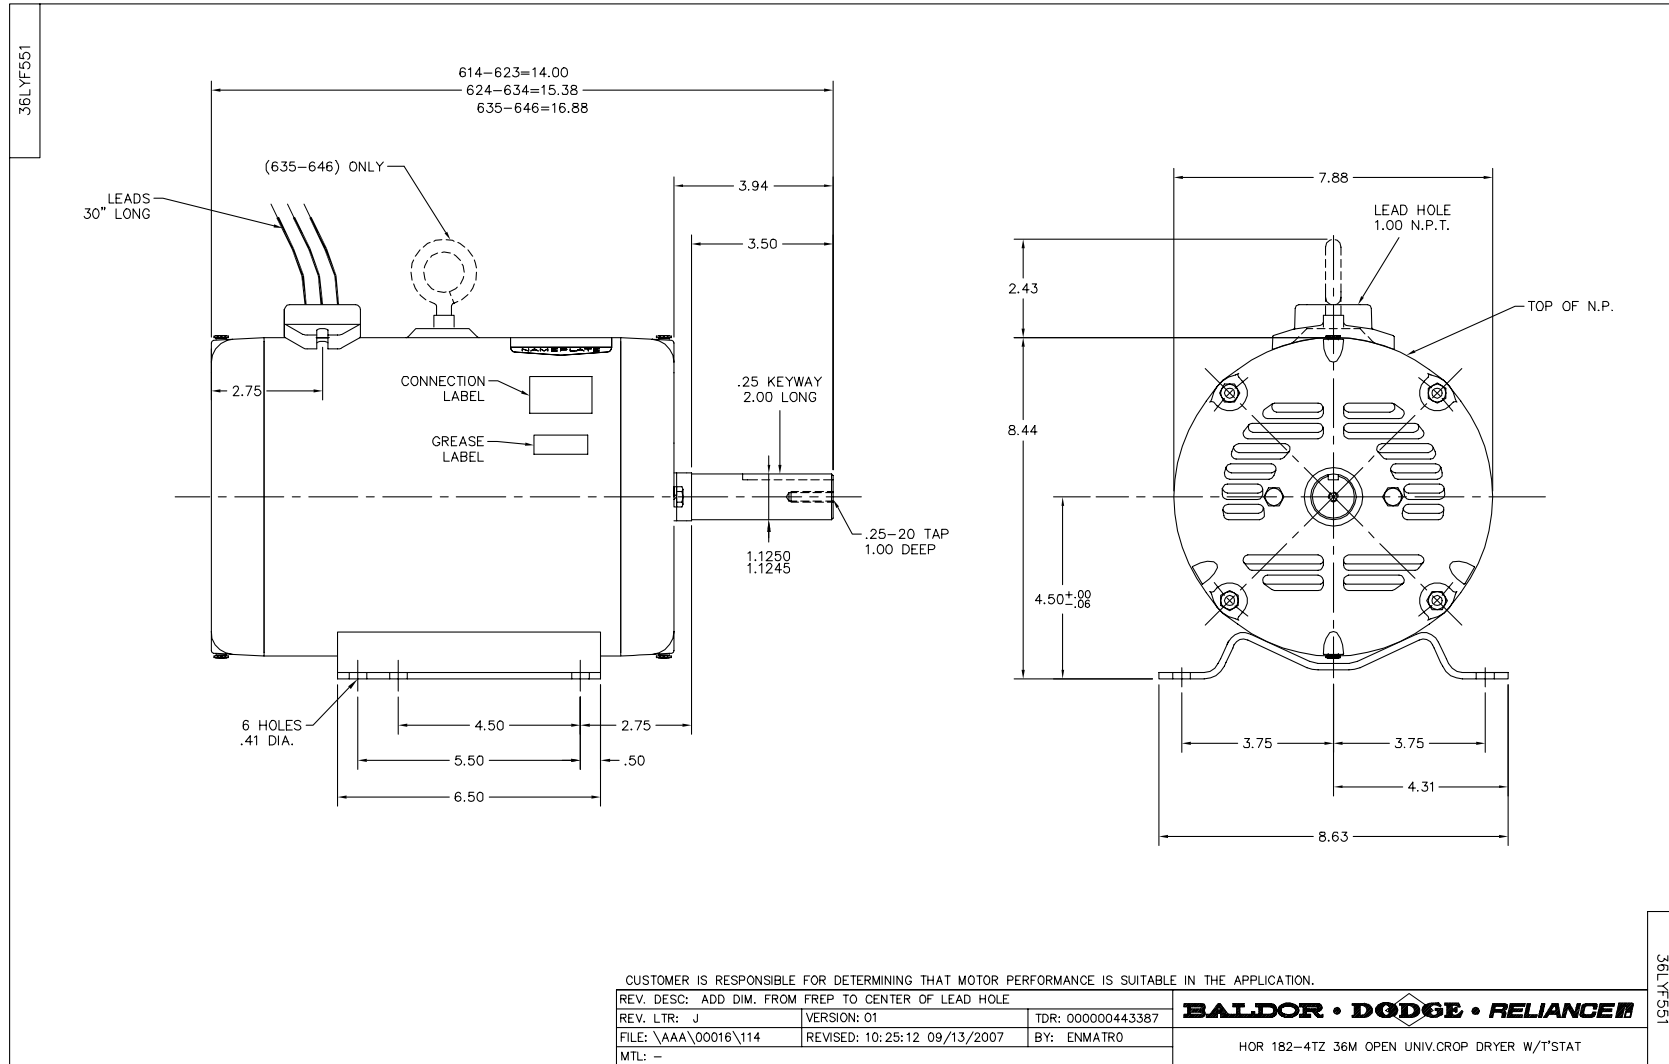

CD0005



LOW VOLTAGE  
(2Y)



LINE

HIGH VOLTAGE  
(1Y)



LINE

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			
REV. LTR: E	BY: JLP	REVISED: 01/19/99 10:15	TDR: 0171435
90000		FILE: AAA00005140	MDL: -
		MTL: -	

**BALDOR ELECTRIC Co.**

3PH, DV, 9 LEADS

CD0005