

BALDOR® • RELIANCE

Product Information Packet

VBM3538-5S

.5HP,1740RPM,3PH,60HZ,56C,3511M,TEFC,F3

Copyright © All product information within this document is subject to Baldor Electric Company copyright © protection, unless otherwise noted.

Part Detail

Revision:	-	Status:	PRD/A	Change #:		Proprietary:	No
Type:	AC	Prod. Type:	3511M	Elec. Spec:	35WGM267	CD Diagram:	
Enclosure:	TEFC	Mfg Plant:		Mech. Spec:	35X055	Layout:	
Frame:	56C	Mounting:	F3	Poles:	04	Created Date:	08-05-2012
Base:	N	Rotation:	R	Insulation:	F	Eff. Date:	08-10-2012
Leads:	3#18	Literature:		Elec. Diagram:		Replaced By:	

Nameplate NP1372L

CAT.NO.	VBM3538-5S											
SPEC.	35X055M267G1											
HP	.5											
VOLTS	575											
AMP	.8											
RPM	1740											
FRAME	56C				HZ		60		PH		3	
SER.F.	1.15				CODE		M		DES		BCLF	
NEMA-NOM-EFF	72				PF		58					
RATING	40C AMB-CONT											
CC					USABLE AT 208V							
DE	6205				ODE		6205					
ENCL	TEFC				SN							
	IP22, BRK 3 FT-LB											


Parts List		
Part Number	Description	Quantity
SA248993	SA 35X055M267G1	1.000 EA
RA235859	RA 35X055M267G1	1.000 EA
S/P111-000-002	CORONA TEST, SUPER E MOTORS - FT. SMITH	1.000 EA
NS2512A01	INSULATOR, CONDUIT BOX X	1.000 EA
35CB4007	KOBX, AUTOPHORETIC (REL# 79097-49-C)	1.000 EA
35GS3009	GASKET, KOBX 35CB4006 (411881-15A)	1.000 EA
51XB1016A05	10-16X5/16HX WA SL SR TYB (F/S)	2.000 EA
WD4100A110	CAPLUG,BP-1 1/8, PLUG W/RECESSED HEAD	1.000 EA
11XW1032G06	10-32 X .38, TAPTITE II, HEX WSHR SLTD U	1.000 EA
HW5100A05	WVY WSHR F/205 & 304 BRGS	1.000 EA
35EP3300A33	SPL FACE MTD EP -ENCL-205 BRG	1.000 EA
51XN1032A20	10-32 X 1 1/4 HX WS SL SR	2.000 EA
HW1001A10	WASHER, #10 SPLT LK, ZN X	4.000 EA
HW2501D13SP	KEY, 3/16 SQ X 1.375	1.000 EA
BR2003D01	SPLINED HUB 7/8 W/O KEY	1.000 EA
35FN3003A02	EXFN, PLASTIC, 5.88 OD, .876 ID (REL)	1.000 EA
35FH4007A01	FAN CVR SSB (REL# 60200449A)	1.000 EA
51XW1032A06	10-32 X .38, TAPTITE II, HEX WSHR SLTD S	4.000 EA
35CB4519	CB LID RAW & UNPRIMED, REL# 79097-50-B	1.000 EA
35GS3019	GASKET, FOR KOBX LID 35CB4519	1.000 EA
51XW0832A07	8-32 X .44, TAPTITE II, HEX WSHR SLTD SE	4.000 EA
WD4006A01	WIRE JOINT, RB-4 OR RB-44	1.000 EA
HW2501D13SP	KEY, 3/16 SQ X 1.375	1.000 EA
HA7000A04	KEY RETAINER 0.625 DIA SHAFTS	1.000 EA


Parts List (continued)		
Part Number	Description	Quantity
85XU0407S04	4X1/4 U DRIVE PIN STAINLESS	2.000 EA
LB1418	INTEGRAL BRK ADJ LABEL (REL# 41171617A)	1.000 EA
MJ1000A75	GREASE, POLYREX EM EXXON	0.050 LB
MG1000N49	PAINT, 678.50 WILKO, REL GRN (55 GA)	0.017 GA
LB1419	CONN LABEL DODGE BRAKE (REL# 411614-15)	1.000 EA
HA3100A13	THRUBOLT 10-32 X 7.750	4.000 EA
43BK0100B03	SSB-3-287/575 (205) L HUB	1.000 EA
LB1424A03	BRAKE VOLT LABEL 287/575V SSB	1.000 EA
LB1119	WARNING LABEL	1.000 EA
LB1125C01	STD (STOCK) CARTON LABEL BALDOR WITH FLA	1.000 EA
LC0006	CONNECTION LABEL	1.000 EA
LB5040	INSTRUCTION TAG, AC & DC	1.000 EA
NP1372L	ALUM UL CSA CE CC	1.000 EA
36PA1001	PACKAGING GROUP	1.000 EA
PK3082	STYROFOAM CRADLE	1.000 EA

Performance Data at 575V, 60Hz, 0.5HP (Typical performance - Not guaranteed values)




General Characteristics							
Full Load Torque:		1.52 LB-FT		Start Configuration:		DOL	
No-Load Current:		0.808 Amps		Break-Down Torque:		7.34 LB-FT	
Line-line Res. @ 25°C.:		62.4 Ohms A Ph / 0.0 Ohms B Ph		Pull-Up Torque:		4.81 LB-FT	
Temp. Rise @ Rated Load:		45 C		Locked-Rotor Torque:		5.44 LB-FT	
Temp. Rise @ S.F. Load:		49 C		Starting Current:		5.2 Amps	
Load Characteristics							
% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor:	27.0	38.0	49.0	59.0	67.0	74.0	64.0
Efficiency:	44.5	60.5	68.2	71.9	73.9	74.2	73.1
Speed:	1785.0	1772.0	1758.0	1742.0	1726.0	1704.0	1732.0
Line Amperes:	0.8	0.815	0.848	0.895	0.96	1.06	0.934

Performance Graph at 575V, 60Hz, 0.5HP Typical performance - Not guaranteed values

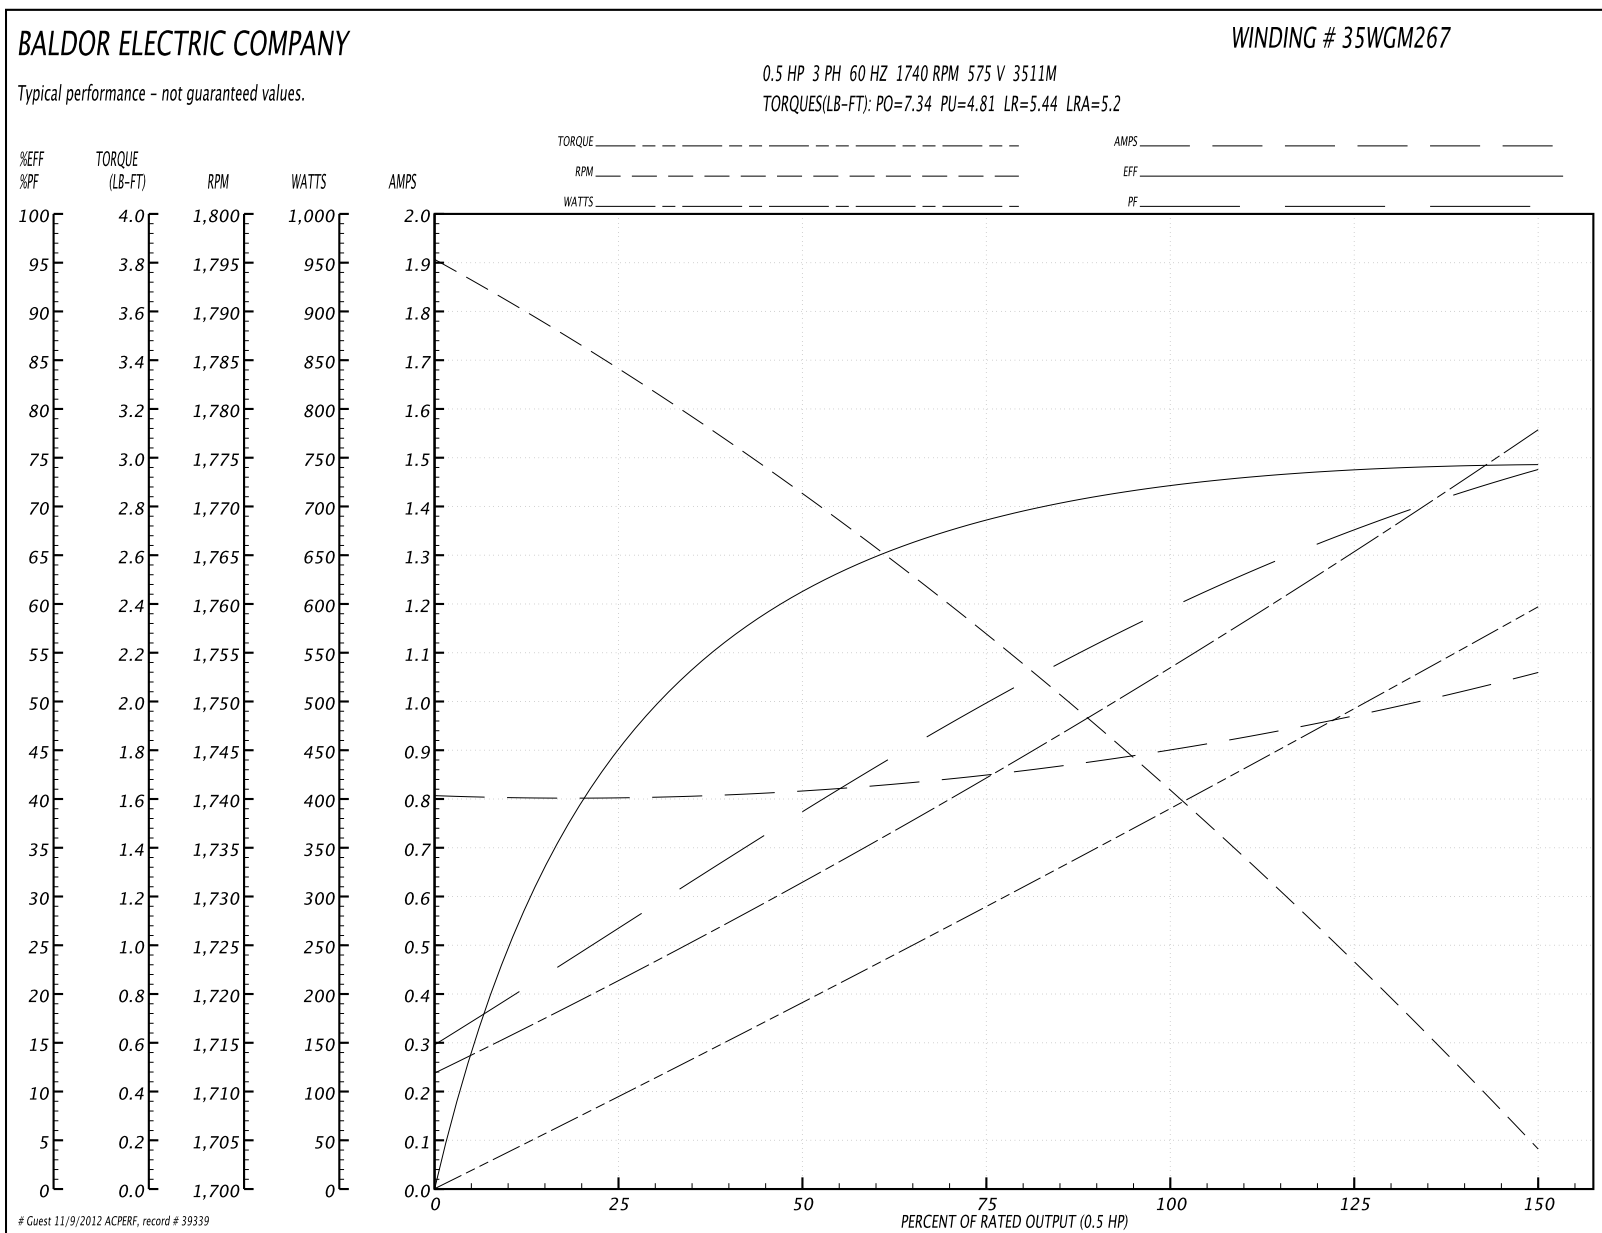

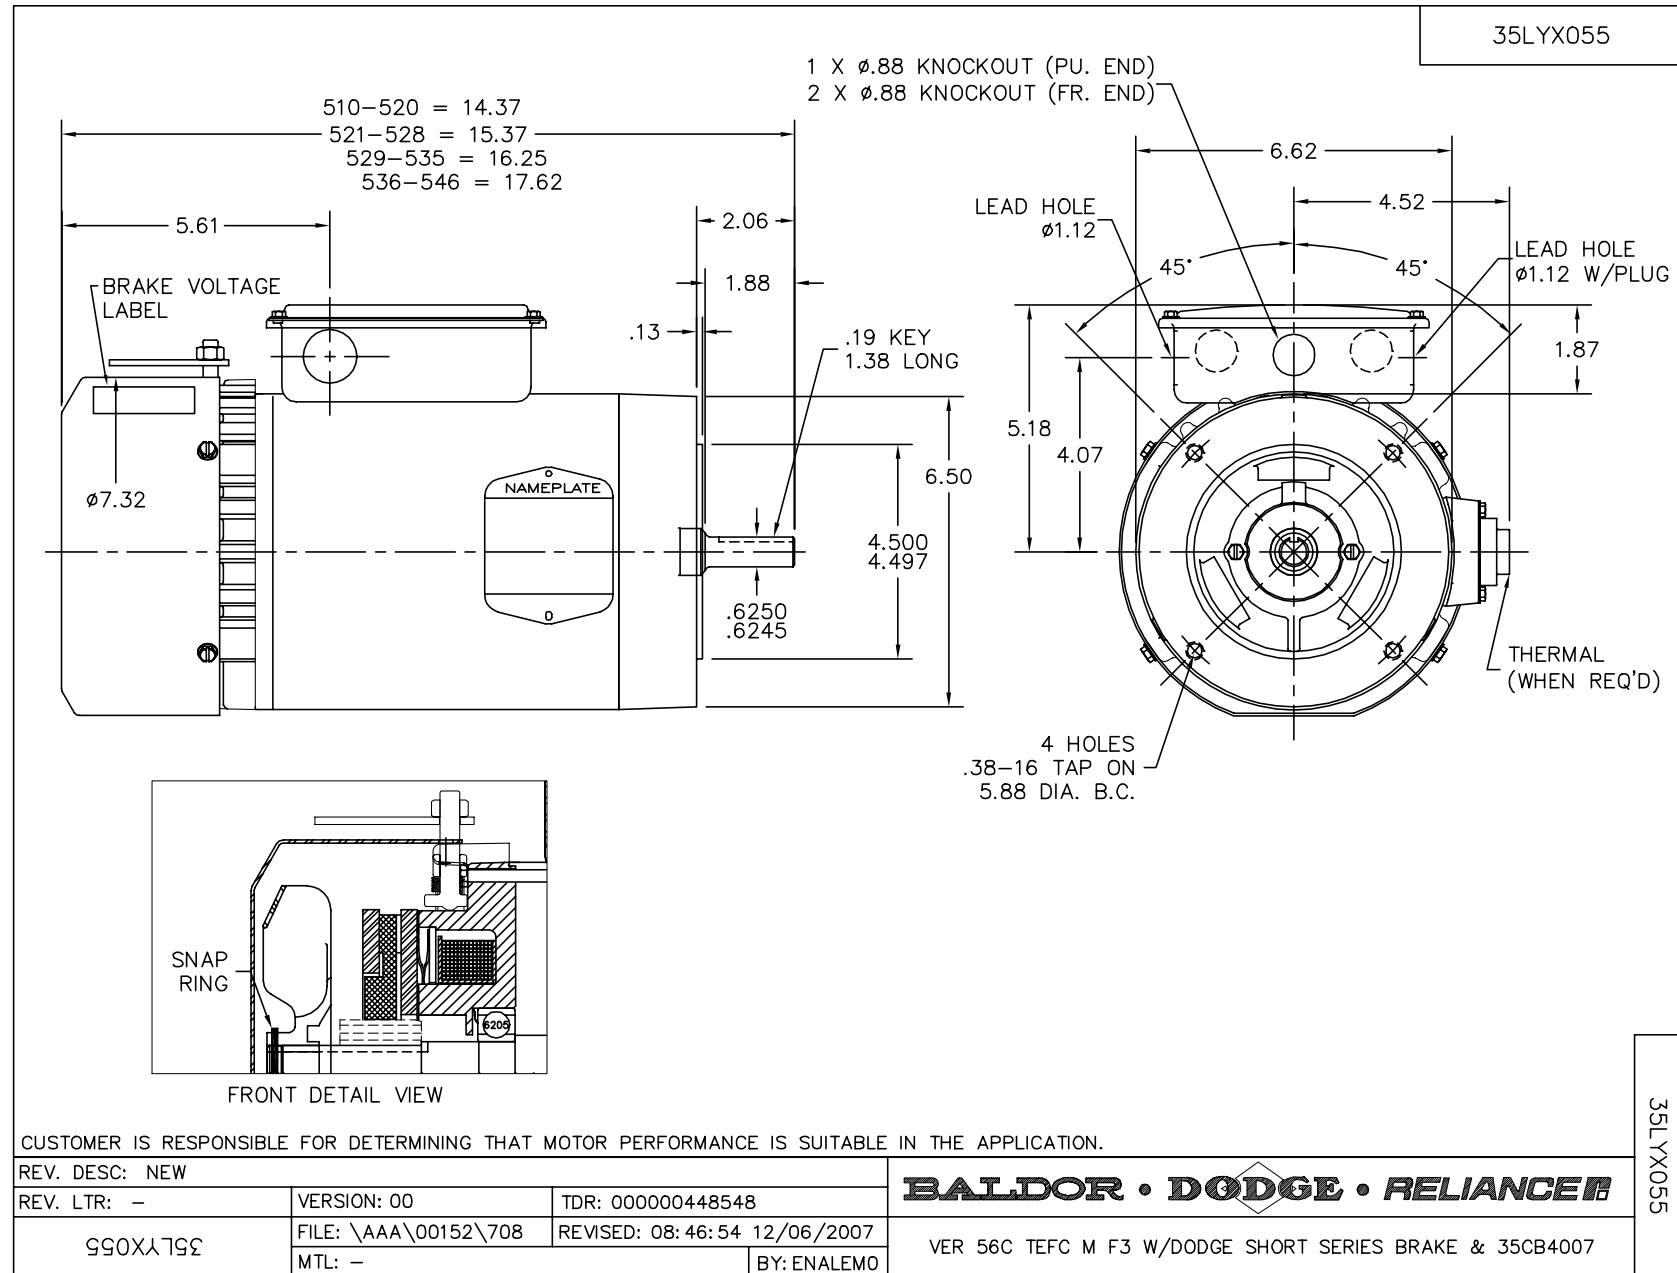

CD0006

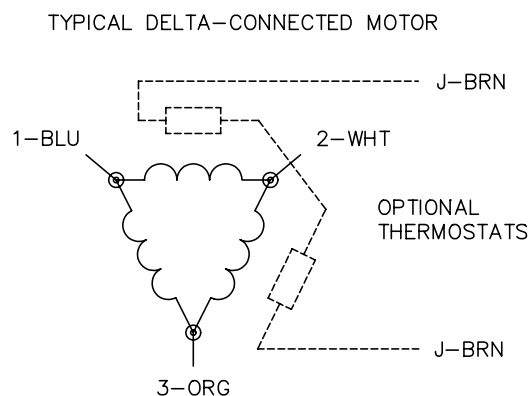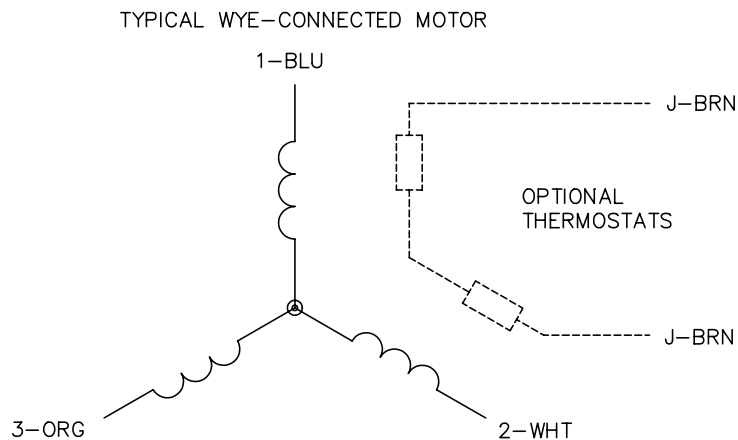

NOTES:

1. THREE LEAD MOTOR MAY BE EITHER WYE CONNECTED OR DELTA CONNECTED.
2. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
3. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
4. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY VARY.
5. LEAD COLORS ARE OPTIONAL. LEADS MUST BE NUMBERED AS SHOWN.

REV. DESC: REVISE TO SHOW OPTIONAL COLORS

REV. LTR: D

BY: JLP

REVISED: 01/21/99 4:02

TDR: 0171435

90000D

FILE: AAA00005141

MDL: -

MTL: -

BALDOR ELECTRIC Co.

3PH, SV, 3 LEADS, WYE OR DELTA CONNECTED

CD0006