

BALDOR® • RELIANCE

Product Information Packet

VFDL3610TM

3HP,1750RPM,1PH,60HZ,184TC,3640LC,TEFC

Copyright © All product information within this document is subject to Baldor Electric Company copyright © protection, unless otherwise noted.

Part Detail									
Revision:	Q	Status:	PRD/A	Change #:		Proprietary:	No		
Type:	AC	Prod. Type:	3640LC	Elec. Spec:	36WGY739	CD Diagram:			
Enclosure:	TEFC	Mfg Plant:		Mech. Spec:	36G681	Layout:			
Frame:	184TC	Mounting:	F1	Poles:	04	Created Date:			
Base:	N	Rotation:	R	Insulation:	F	Eff. Date:	04-27-2012		
Leads:	2#14 A PH,3#16 B&J	Literature:		Elec. Diagram:		Replaced By:			
Nameplate NP1280L									
CAT.NO.	VF DL3610TM								
SPEC.	36G681Y739								
HP	3								
VOLTS	230								
AMP	15.5								
RPM	1750								
FRAME	184TC	HZ			60	PH	1		
SER.F.	1.00	CODE			M	DES	L	CL	F
NEMA-NOM-EFF	80	PF			76				
RATING	40C AMB-CONT								
CC				USABLE AT 208V					
DE	6206	ODE			6205				
ENCL	TEFC	SN							


Parts List		
Part Number	Description	Quantity
SA042963	SA 36G681Y739	1.000 EA
RA038749	RA 36G681Y739	1.000 EA
TP5059	GENERIC THERMAL KIT	1.000 EA
36CB1000A22	CONDUIT BOX, MACH	1.000 EA
37GS1000SP	GASKET, CONDUIT BOX STD., .06 THICK LEXI	1.000 EA
51XB1016A07	10-16 X 7/16 HXWSSLD SERTYB	2.000 EA
NS2500A02	INSULATOR, MAN THER PROT	1.000 EA
HA6015A08	THERMAL RETAINER (PLATED)	1.000 EA
RM1014A01SP	BUTYL RUB.THRM COV. (MENA)	1.000 EA
51XB1214A10	12-14 X 5/8HX WS SL SR TYBX	2.000 EA
11XW1032G06	10-32 X .38, TAPTITE II, HEX WSHR SLTD U	1.000 EA
HW3001B01	003SS CUP WASHER, FOR #8 SCREW	1.000 EA
36EP3104A01	FREP MACH W/GRSR, RAISED FH PADS	1.000 EA
HW4500A01	1641B(ALEMITE)400 UNIV, GREASE FITT	1.000 EA
13XF0832A08	8-32 X.50 PAN HD,SLTD, TYPE F SCREW, ZIN	2.000 EA
36GS3000	GASKET, CAPACITOR COVER LEXIDE	1.000 EA
10XN2520A12	O1/4-20X 3/4 HEX HEAD CAP	2.000 EA
HW5100A05	WVY WSHR F/205 & 304 BRGS	1.000 EA
36EP1300A01SP	PU ENDPLATE, MACH	1.000 EA
HW4500A01	1641B(ALEMITE)400 UNIV, GREASE FITT	1.000 EA
10XN2520A24	1/4-20X 1 1/2 HEX HD X	4.000 EA
HW1001A25	LOCKWASHER 1/4, ZINC PLT .493 OD, .255 I	4.000 EA
XY2520A12	1/4-20 HEX NUT, DIRECTIONAL SERRATIONS	4.000 EA
36FH4009A102SP	IEC FH GREASER W/AUTOPHERETIC PRIMER	1.000 EA


Parts List (continued)		
Part Number	Description	Quantity
51XW1032A06	10-32 X .38, TAPTITE II, HEX WSHR SLTD S	3.000 EA
36CB4516	36 LIPPED CB LID	1.000 EA
37GS1001SP	GASKET, CONDUIT BOX LID, .06 THICK LEXID	1.000 EA
51XW0832A07	8-32 X .44, TAPTITE II, HEX WSHR SLTD SE	4.000 EA
HA1005A02SP	SLINGER, OD 2.00, ID 1.14, 206 BRG,	1.000 EA
HW2501E16	3KEY, 1/4 SQ X 1.750	1.000 EA
HA7000A02	KEY RETAINER RING, 1 1/8 DIA, 1 3/8 DIA	1.000 EA
85XU0407S04	4X1/4 U DRIVE PIN STAINLESS	2.000 EA
LB1087	LABEL,MANUAL RESET (ROLL LABEL)	1.000 EA
36CB5005A10	CAPACITOR BOX KIT,36CB3800,EC1216C06	1.000 EA
MJ1000A75	GREASE, POLYREX EM EXXON	0.050 LB
MG1025Z20	ACTIVATOR WILKOFAS T 060.32	0.010 GA
36FN3000A01SP	EXFN, PLASTIC, 7.00 OD, .912 ID	1.000 EA
51XB1214A16	12-14X1.00 HXWSSLD SERTYB	1.000 EA
MG1025C02	PAINT, 787.105 LITE TAN EPOXY (USE W/MG1	0.022 GA
SP5064A01	MODEL 36 TYPE LC STATIONARY SWITCH LEAD	1.000 EA
HA3101A28	THRUBOLT 1/4-20 X 12.500 OHIO ROD	4.000 EA
LB1119	WARNING LABEL	1.000 EA
LB1125C01	STD (STOCK) CARTON LABEL BALDOR WITH FLA	1.000 EA
LC0002	CONNECTION LABEL	1.000 EA
NP1280L	ALUM FARM DUTY UL CSA CC THERMAL	1.000 EA
36PA1001	PACKAGING GROUP	1.000 EA
PK3082	STYROFOAM CRADLE	1.000 EA

Performance Data at 230V, 60Hz, 3.0HP (Typical performance - Not guaranteed values)


General Characteristics							
Full Load Torque:		9.0 LB-FT		Start Configuration:		DOL	
No-Load Current:		10.7 Amps		Break-Down Torque:		32.0 LB-FT	
Line-line Res. @ 25°C.:		0.472 Ohms A Ph / 1.53 Ohms B Ph		Pull-Up Torque:		31.0 LB-FT	
Temp. Rise @ Rated Load:		85 C		Locked-Rotor Torque:		37.0 LB-FT	
Temp. Rise @ S.F. Load:				Starting Current:		144.0 Amps	
Load Characteristics							
% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor:	39.0	56.0	68.0	76.0	82.0	85.0	0.0
Efficiency:	53.4	70.8	77.9	81.0	82.0	81.9	0.0
Speed:	1791.0	1782.0	1775.0	1768.0	1759.0	1749.0	0.0
Line Amperes:	10.9	11.8	13.5	15.5	18.0	20.7	0.0

Performance Graph at 230V, 60Hz, 3.0HP Typical performance - Not guaranteed values

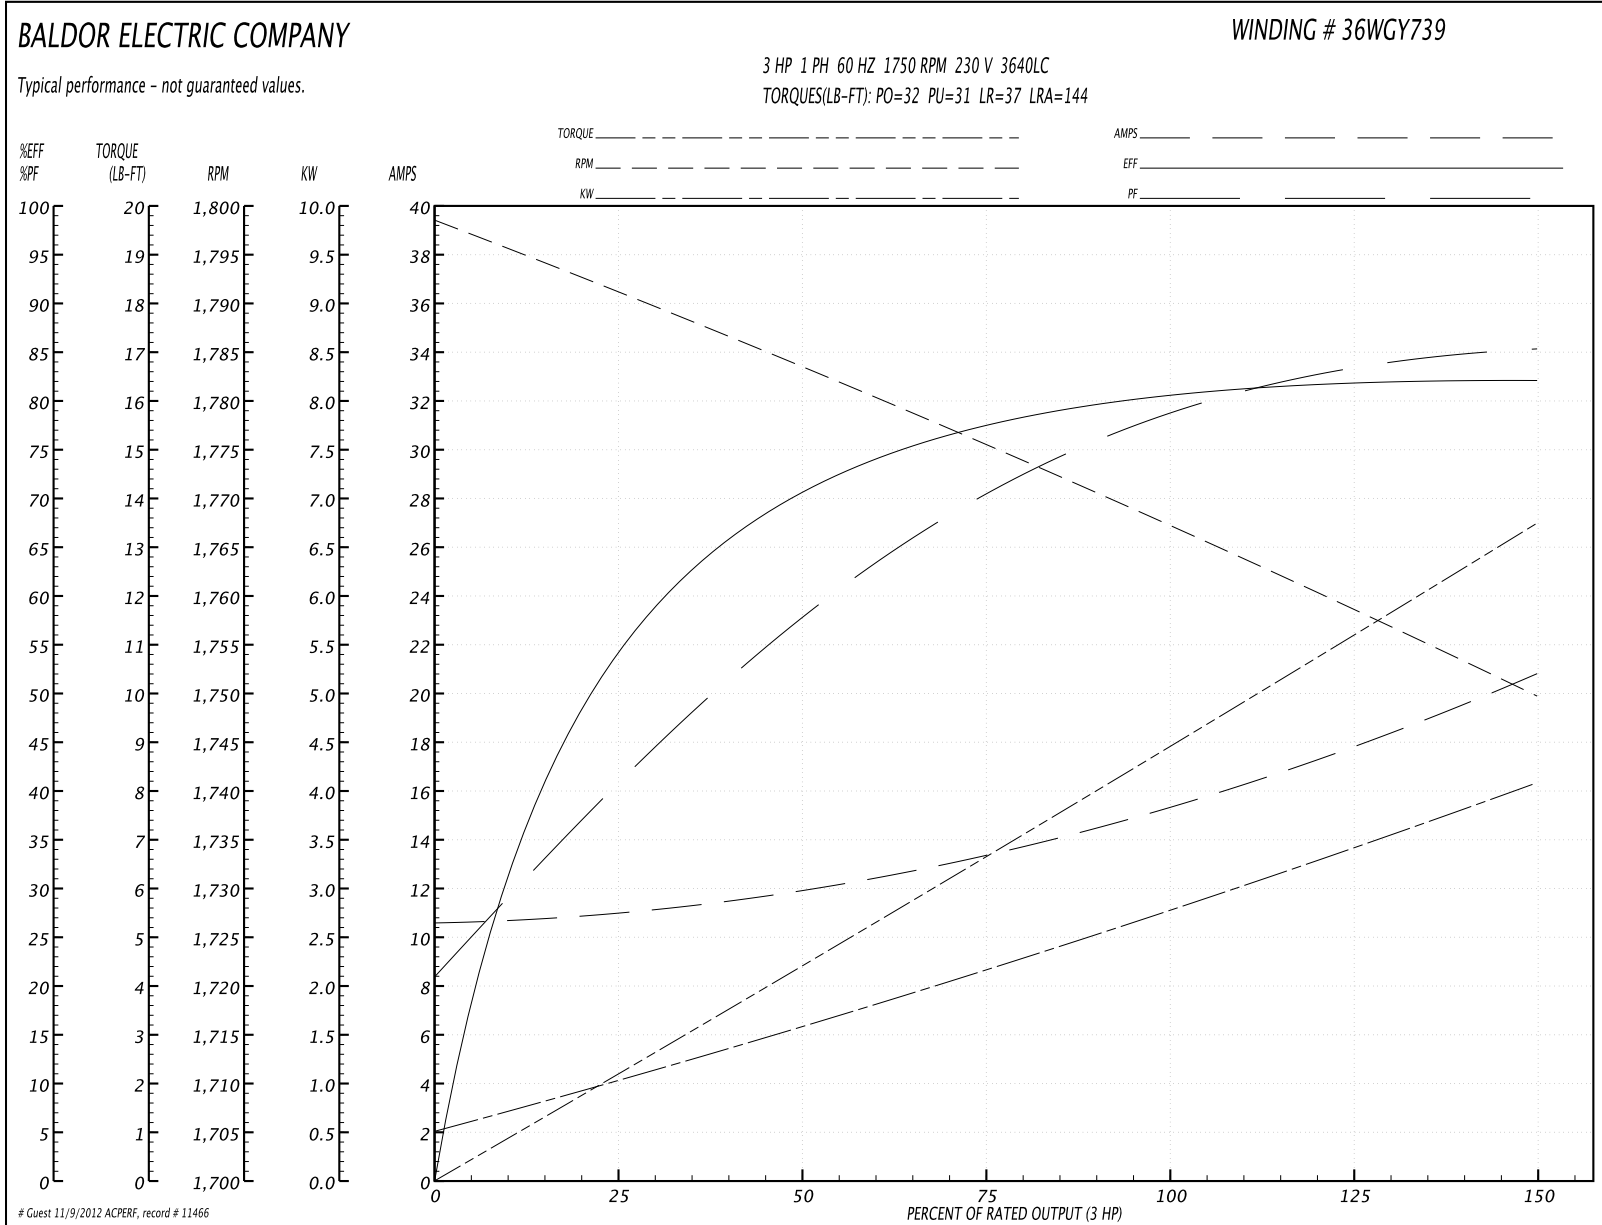

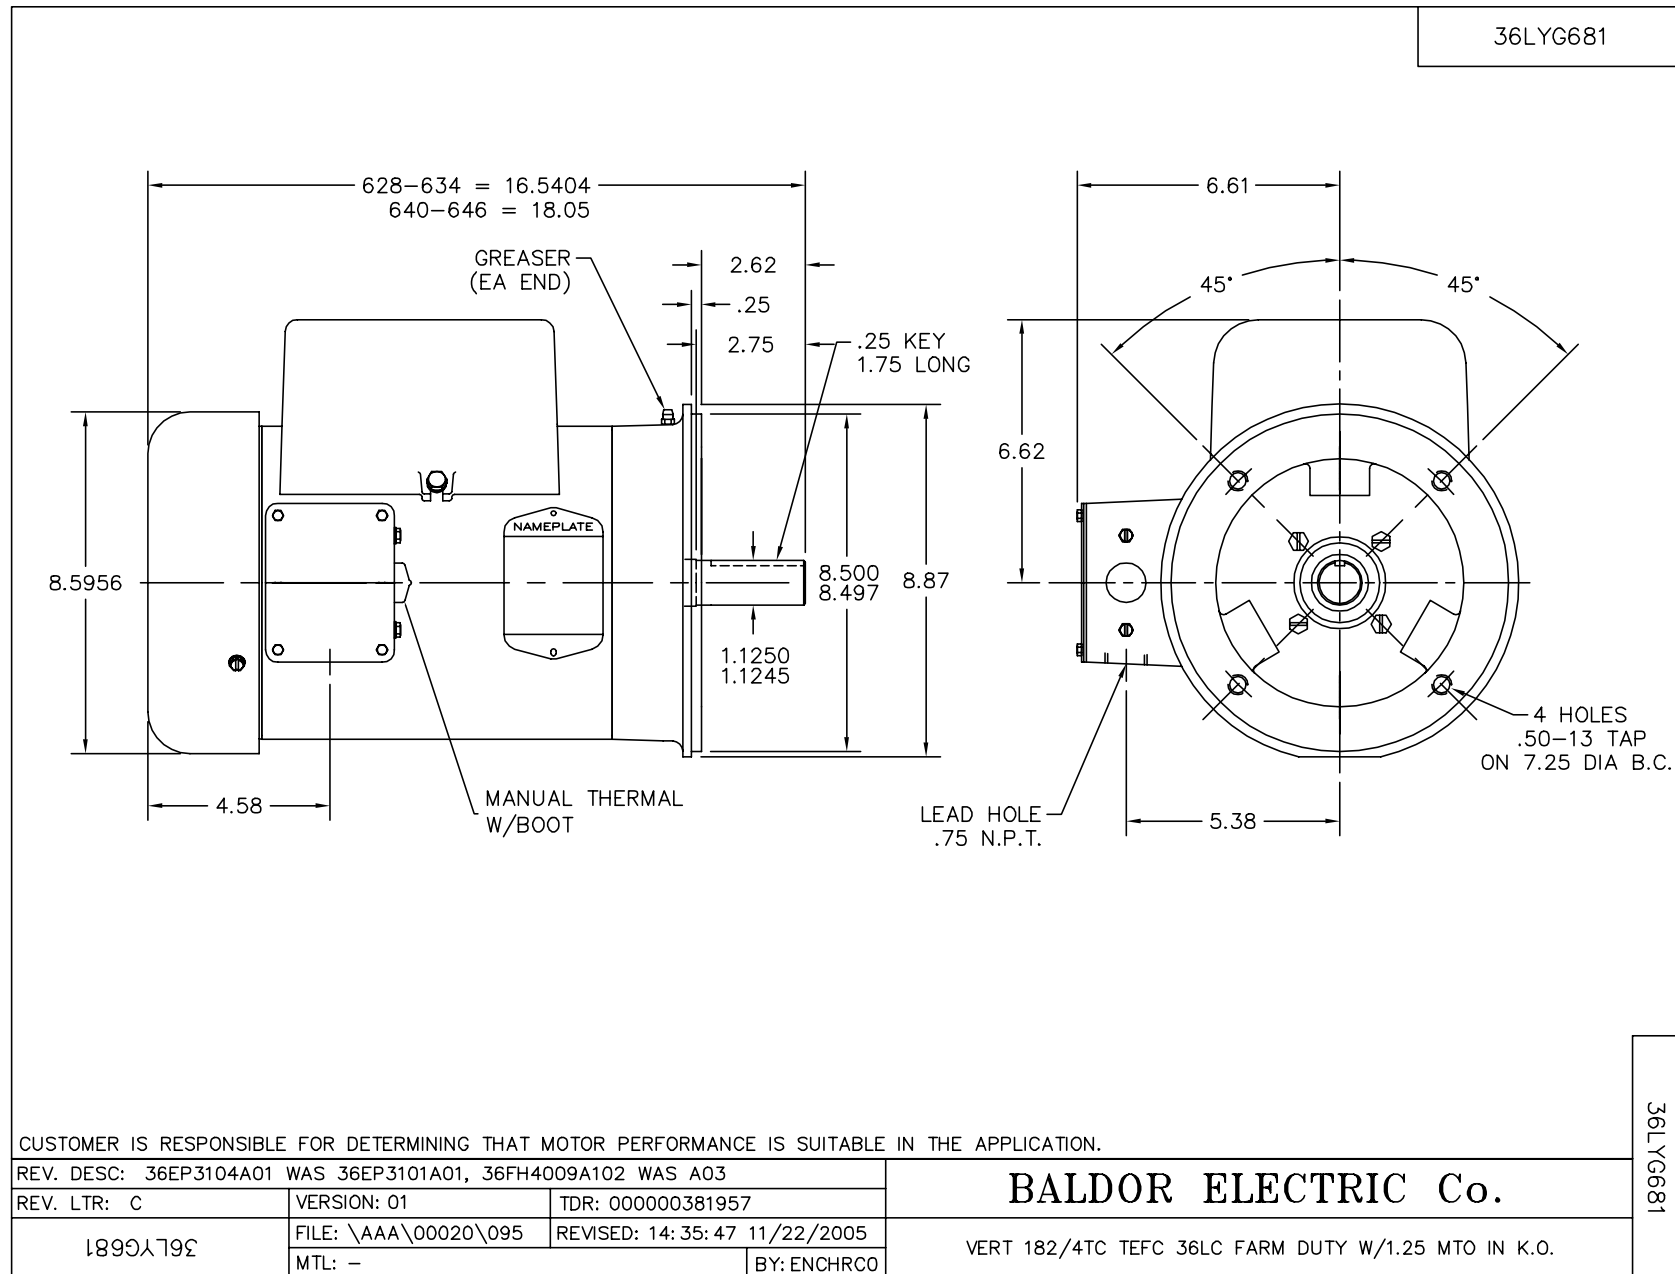

CD0002A02

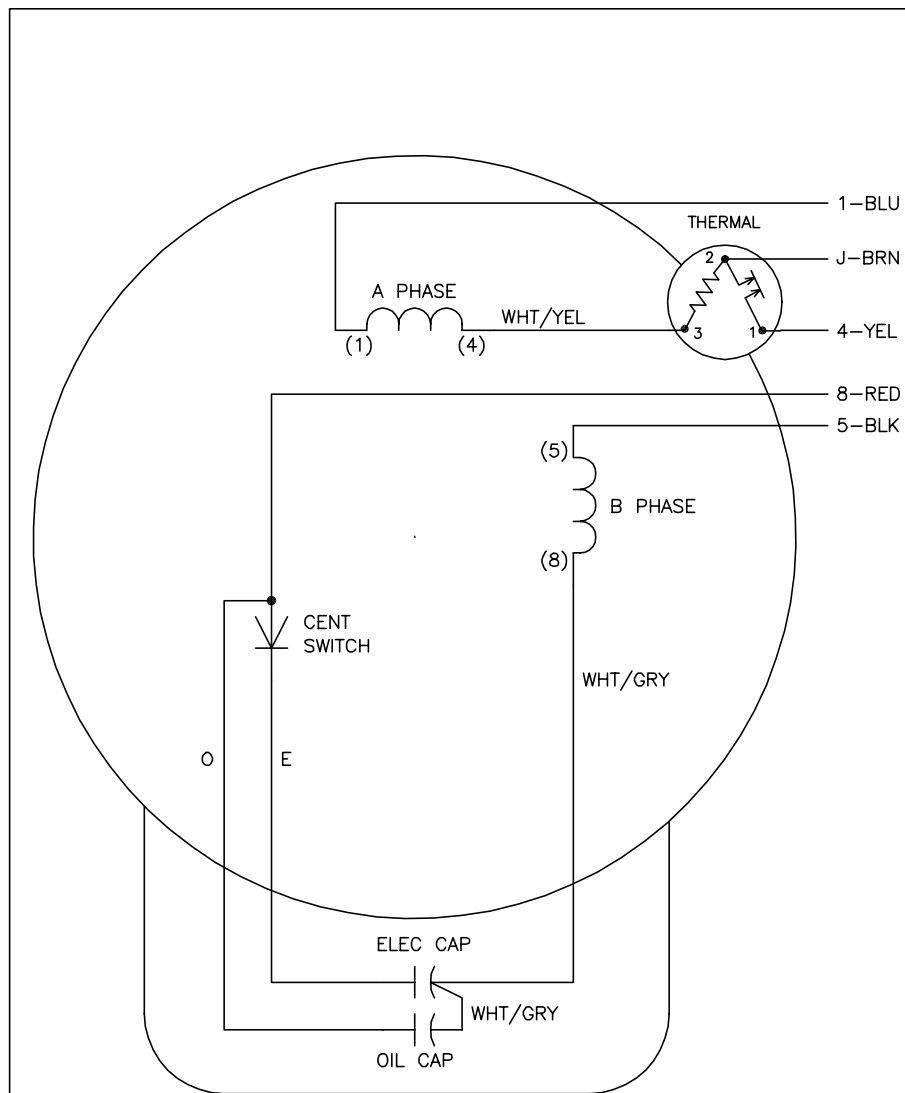

	LINE A	LINE B	JOIN
STD	1,8	4	J,5
OPP	1,5	4	J,8

NOTES:

1. STANDARD ROTATION IS CCW FACING END OPPOSITE SHAFT EXTENSION.
2. MULTIPLE CAPACITORS ARE CONNECTED IN PARALLEL UNLESS OTHERWISE SPECIFIED.
3. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: REMOVE 2-TERMINAL THERMAL DETAIL, SEE CD0002A04

REV. LTR: D

VERSION: 01

TDR: 000000360649

 Z0VZ0000C
CD0002A02

FILE: \AAA\00007\520

REVISED: 17:11:40 04/15/2005

MTL: -

BY: ENJOEPO

BALDOR ELECTRIC Co.

TYPE LC, SV, REV, THERMAL, 5 LEADS

CD0002A02