

BALDOR® • RELIANCE

Product Information Packet

VM3539

.5HP,1140RPM,3PH,60HZ,56C,3418M,TEFC,F1

Copyright © All product information within this document is subject to Baldor Electric Company copyright © protection, unless otherwise noted.

Part Detail									
Revision:	S	Status:	PRD/A	Change #:		Proprietary:	No		
Type:	AC	Prod. Type:	3418M	Elec. Spec:	34WG5884	CD Diagram:			
Enclosure:	TEFC	Mfg Plant:		Mech. Spec:	34A063	Layout:			
Frame:	56C	Mounting:	F1	Poles:	06	Created Date:			
Base:	N	Rotation:	R	Insulation:	B	Eff. Date:	06-06-2011		
Leads:	9#18	Literature:		Elec. Diagram:		Replaced By:			
Nameplate NP1256L									
CAT.NO.	VM3539								
SPEC.	34A63-5884								
HP	.5								
VOLTS	230/460								
AMP	2.4/1.2								
RPM	1140								
FRAME	56C	HZ	60	PH	3				
SER.F.	1.25	CODE	J	DES	B	CLASS	B		
NEMA-NOM-EFF	72	PF	55						
RATING	40C AMB-CONT								
CC		USABLE AT 208V	2.7						
DE	6203	ODE	6203						
ENCL	TEFC	SN							
	SFA 2.6/1.3								

Parts List		
Part Number	Description	Quantity
SA009882	SA 34A63-5884	1.000 EA
RA006327	RA 34A63-5884	1.000 EA
NS2512A01	INSULATOR, CONDUIT BOX X	1.000 EA
34CB3002A	CB CAST W/.88 DIA HOLE	1.000 EA
34GS1029A01	GASKET, CONDUIT BOX	1.000 EA
51XB1016A07	10-16 X 7/16 HXWSSLD SERTYB	2.000 EA
11XW1032G06	10-32 X .38, TAPTITE II, HEX WSHR SLTD U	1.000 EA
34EP3102A01SP	FR ENDPLATE, MACH	1.000 EA
HW5100A03SP	WAVY WASHER (W1543-017)	1.000 EA
34EP3300A24SP	PU ENDPLATE, MACH	1.000 EA
51XN1032A20	10-32 X 1 1/4 HX WS SL SR	2.000 EA
34FN3002A01SP	EXTERNAL FAN, PLASTIC, .637/.639 HUB W/	1.000 EA
51XW1032A06	10-32 X .38, TAPTITE II, HEX WSHR SLTD S	3.000 EA
34CB4517	CB LID 4 MTG HOLES .22 DIA STAMPED, FOR	1.000 EA
34GS1031A01	GASKET, FLAT CONDUIT BOX LID (LEXIDE)	1.000 EA
51XW0832A07	8-32 X .44, TAPTITE II, HEX WSHR SLTD SE	4.000 EA
HW2501D13SP	KEY, 3/16 SQ X 1.375	1.000 EA
34FH4002A01	IEC FH NO GREASER	1.000 EA
HA7000A04	KEY RETAINER 0.625 DIA SHAFTS	1.000 EA
MG1000G27	PAINT- S9282E CHARCOAL GREY	0.014 GA
10XF0440S02	04-40 X 1/8 TYPE F HEX HD STAINLESS STIC	2.000 EA
HA3100A12	THRUBOLT 10-32 X 7.375	4.000 EA
LB1125C01	STD (STOCK) CARTON LABEL BALDOR WITH FLA	1.000 EA
LC0005E01	CONN.DIA./WARNING LABEL (LC0005/LB1119)	1.000 EA

Parts List (continued)		
Part Number	Description	Quantity
NP1256L	ALUM UL CSA CC	1.000 EA
34PA1005	PACKING GROUP, BALDOR	1.000 EA
PK3083T	STYROFOAM PACKING CRADLE W/TAPE	1.000 EA


Performance Data at 460V, 60Hz, 0.5HP (Typical performance - Not guaranteed values)**General Characteristics**

Full Load Torque:	2.3 LB-FT	Start Configuration:	DOL
No-Load Current:	0.95 Amps	Break-Down Torque:	7.7 LB-FT
Line-line Res. @ 25°C.:	39.6 Ohms A Ph / 0.0 Ohms B Ph	Pull-Up Torque:	6.0 LB-FT
Temp. Rise @ Rated Load:	63 C	Locked-Rotor Torque:	6.2 LB-FT
Temp. Rise @ S.F. Load:	77 C	Starting Current:	5.0 Amps

Load Characteristics

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor:	20.0	34.0	45.0	55.0	62.0	68.0	62.0
Efficiency:	48.0	63.0	67.0	72.0	72.0	71.0	72.0
Speed:	1185.0	1170.0	1155.0	1140.0	1120.0	1100.0	1120.0
Line Amperes:	0.95	1.0	1.1	1.2	1.3	1.5	1.3

Performance Graph at 460V, 60Hz, 0.5HP Typical performance - Not guaranteed values

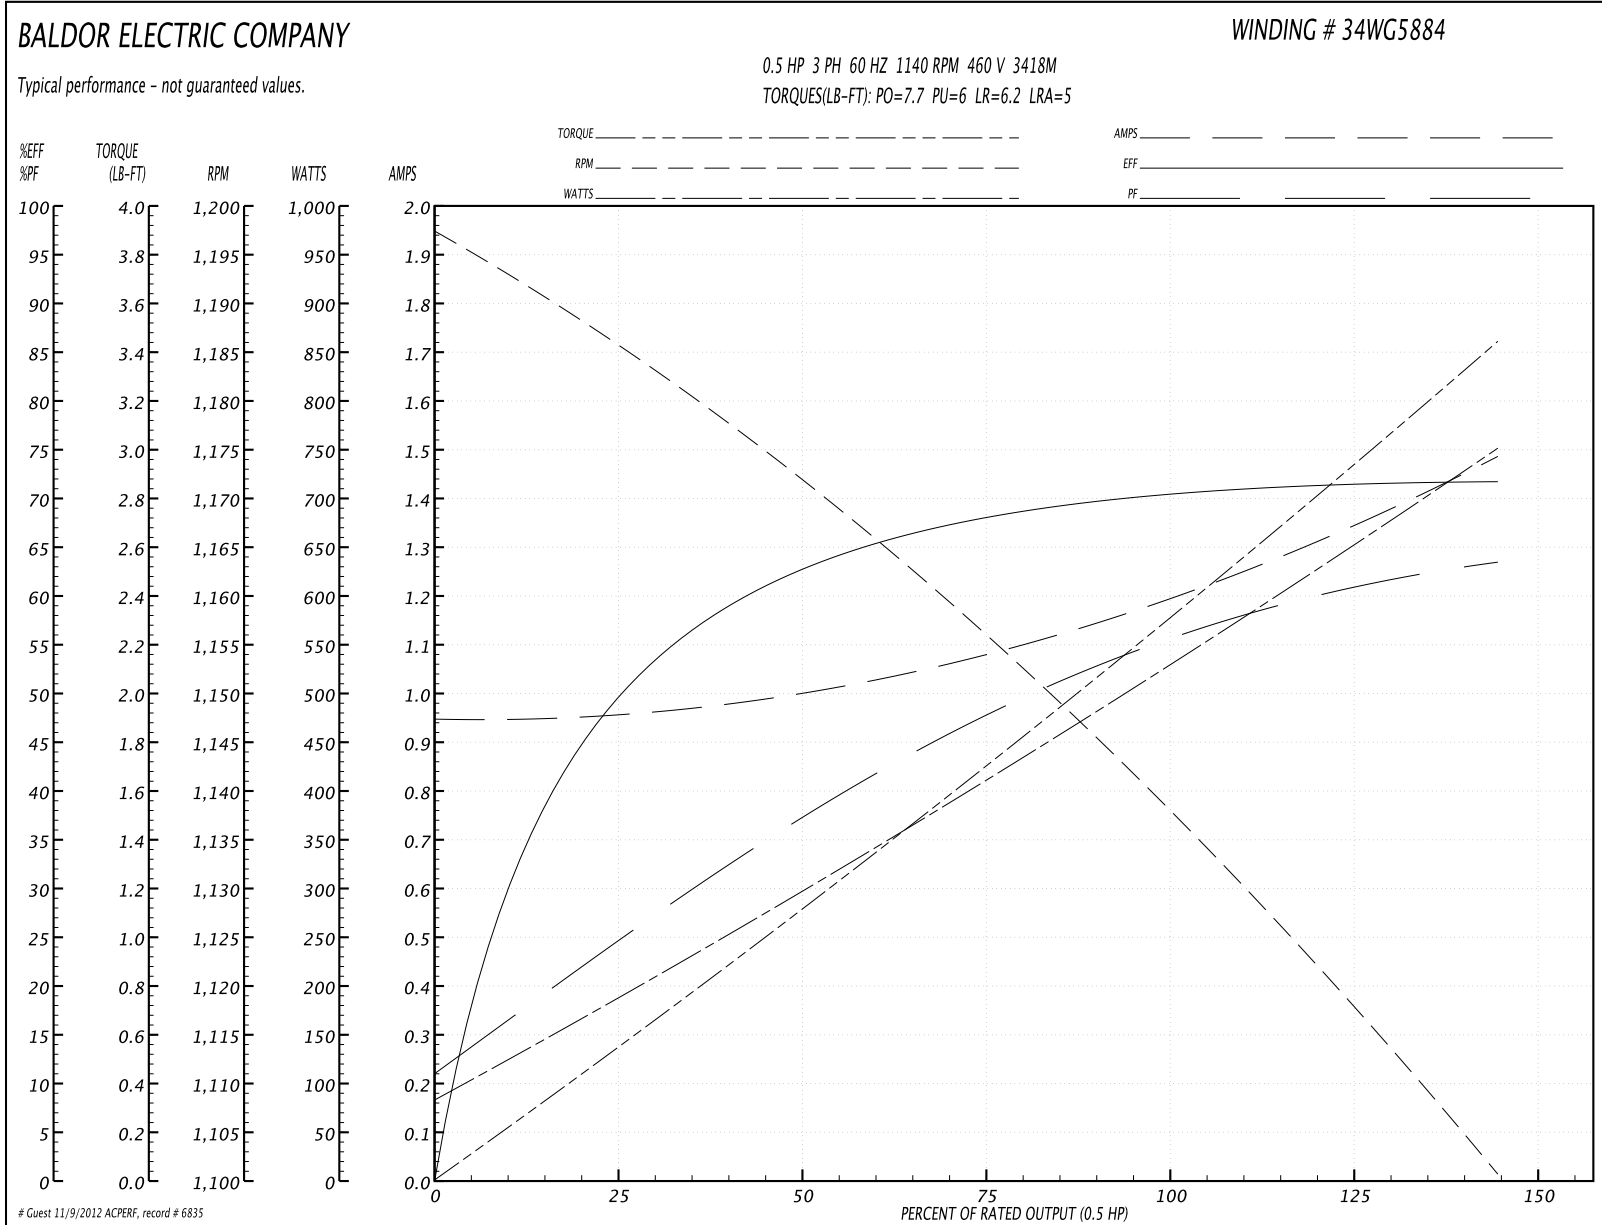

Performance Data at 230V, 60Hz, 0.5HP (Typical performance - Not guaranteed values)**General Characteristics**

Full Load Torque:	2.3 LB-FT	Start Configuration:	DOL
No-Load Current:	1.9 Amps	Break-Down Torque:	7.7 LB-FT
Line-line Res. @ 25°C.:	9.51 Ohms A Ph / 0.0 Ohms B Ph	Pull-Up Torque:	6.0 LB-FT
Temp. Rise @ Rated Load:	63 C	Locked-Rotor Torque:	6.2 LB-FT
Temp. Rise @ S.F. Load:	77 C	Starting Current:	10.0 Amps

Load Characteristics

% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor:	27.0	38.0	48.0	54.0	61.0	64.0	61.0
Efficiency:	47.9	63.1	67.3	72.0	72.2	71.0	72.2
Speed:	1185.0	1170.0	1155.0	1140.0	1120.0	1100.0	1120.0
Line Amperes:	1.9	2.0	2.2	2.4	2.6	3.0	2.6

Performance Graph at 230V, 60Hz, 0.5HP Typical performance - Not guaranteed values

