








## Wiring




**NOTE:** Wiring shown is for 4-color segmented models. Depending on the model and number of segments, pins 5, 3, 2 and 1 may not be used.

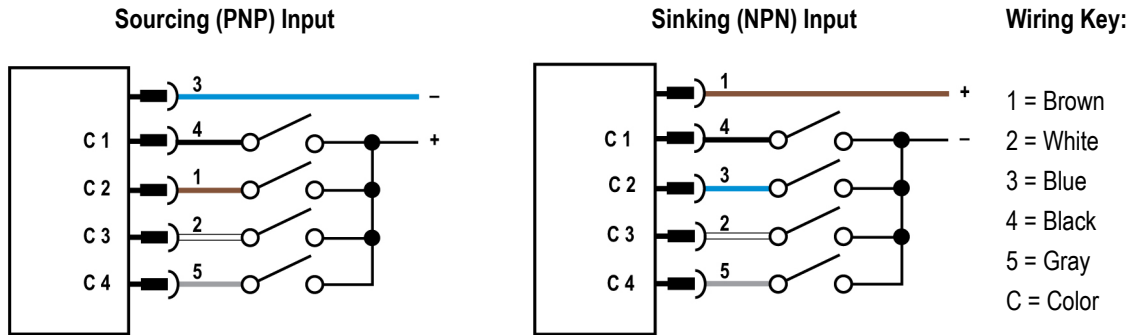


## Terminal Block Locations

### PNP Internal Terminal Blocks



### NPN Internal Terminal Blocks



### Wiring Key:

- 1 = Brown
- 2 = White
- 3 = Blue
- 4 = Black
- 5 = Gray
- C = Color

## 5-Pin Euro-Style Cordsets





### 5-Pin M12/Euro-Style Cordsets (straight connector)

- MQDC1-506 , 2 m (6.5 ft)
- MQDC1-515 , 5 m (15 ft)
- MQDC1-530 , 9 m (30 ft)

### 5-Pin M12/Euro-Style Cordsets (right-angle connector)

- MQDC1-506RA , 2 m (6.5 ft)
- MQDC1-515RA , 5 m (15 ft)
- MQDC1-530RA , 9 m (30 ft)
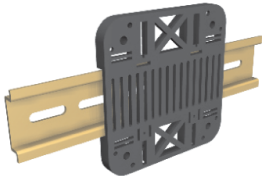
## Mounting Brackets

Model		Features	Mounting System	
<b>SMBDX80D</b>		<ul style="list-style-type: none"> <li>• DIN-mount bracket for K80L models</li> <li>• Hardware included to mount to K80L housing</li> <li>• ABS</li> </ul>		
<b>Stainless Steel</b>	<b>Aluminum</b>	<ul style="list-style-type: none"> <li>• Elevated-use stand-off pipe (½" NPSM/ DN15)</li> <li>• Polished 304 stainless steel or anodized aluminum surface</li> <li>• ½" NPT thread at both ends</li> <li>• Compatible with most industrial environments</li> </ul>		
<b>SOP-E12-150SS</b> 150 mm (6") long	<b>SOP-E12-150A</b> 150 mm (6") long			
<b>SOP-E12-300SS</b> 300 mm (12") long	<b>SOP-E12-300A</b> 300 mm (12") long			
<b>SA-E12M30</b>		<ul style="list-style-type: none"> <li>• Streamlined acetal mounting base adapter/cover</li> <li>• Connects between ½" NPSM/DN15 pipe and 30 mm (1-3/16") drilled hole</li> <li>• Mounting hardware included</li> </ul>		

## Accessory Quadrant Labels

Transparent self-adhesive cover labels for printing in a standard laser printer; print your own labels to easily identify each quadrant. Clear protective labels provide additional protection for laser print work in many industrial environments. Six labels per sheet; 5 sheets per package.

Model	Description	Size
<b>SALK-K80L4-0</b>	1-quadrant transparent laser label (includes 30 labels)	8.5" x 11"

## Banner Engineering Corp Limited Warranty

Banner Engineering Corp. warrants its products to be free from defects in material and workmanship for one year following the date of shipment. Banner Engineering Corp. will repair or replace, free of charge, any product of its manufacture which, at the time it is returned to the factory, is found to have been defective during the warranty period. This warranty does not cover damage or liability for misuse, abuse, or the improper application or installation of the Banner product.

**THIS LIMITED WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES WHETHER EXPRESS OR IMPLIED (INCLUDING, WITHOUT LIMITATION, ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE), AND WHETHER ARISING UNDER COURSE OF PERFORMANCE, COURSE OF DEALING OR TRADE USAGE.**

This Warranty is exclusive and limited to repair or, at the discretion of Banner Engineering Corp., replacement. **IN NO EVENT SHALL BANNER ENGINEERING CORP. BE LIABLE TO BUYER OR ANY OTHER PERSON OR ENTITY FOR ANY EXTRA COSTS, EXPENSES, LOSSES, LOSS OF PROFITS, OR ANY INCIDENTAL, CONSEQUENTIAL OR SPECIAL DAMAGES RESULTING FROM ANY PRODUCT DEFECT OR FROM THE USE OR INABILITY TO USE THE PRODUCT, WHETHER ARISING IN CONTRACT OR WARRANTY, STATUTE, TORT, STRICT LIABILITY, NEGLIGENCE, OR OTHERWISE.**

Banner Engineering Corp. reserves the right to change, modify or improve the design of the product without assuming any obligations or liabilities relating to any product previously manufactured by Banner Engineering Corp.

### Contact Us

For more information: Contact your local Banner representative or Banner Corporate Offices around the world.

**Corporate Headquarters: Banner Engineering Corp.** 9714 Tenth Ave. North, Mpls., MN 55441, Tel: 763-544-3164, [www.bannerengineering.com](http://www.bannerengineering.com), [sensors@bannerengineering.com](mailto:sensors@bannerengineering.com)

**Europe: Banner Engineering Europe** Park Lane, Culliganlaan 2F, Diegem B-1831 BELGIUM, Tel: 32-2 456 07 80, Fax: 32-2 456 07 89, [www.bannereurope.com](http://www.bannereurope.com), [mail@bannereurope.com](mailto:mail@bannereurope.com)

**Latin America:** Contact Banner Engineering Corp. (US) or e-mail **Mexico:** [mexico@bannerengineering.com](mailto:mexico@bannerengineering.com); or **Brazil:** [brasil@bannerengineering.com](mailto:brasil@bannerengineering.com)

#### Asia:

**Banner Engineering China** Shanghai Rep Office Rm. G/H/I, 28th Flr. Cross Region Plaza No. 899, Lingling Road, Shanghai 200030 CHINA, Tel: 86-21-54894500, Fax: 86-21-54894511, [www.bannerengineering.com.cn](http://www.bannerengineering.com.cn), [sensors@bannerengineering.com.cn](mailto:sensors@bannerengineering.com.cn)

**Banner Engineering Japan** Cent-Urban Building 305 3-23-15, Nishi-Nakajima Yodogawa-Ku, Osaka 532-0011 JAPAN, Tel: 81-6-6309-0411, Fax: 81-6-6309-0416, [www.bannerengineering.co.jp](http://www.bannerengineering.co.jp), [mail@bannerengineering.co.jp](mailto:mail@bannerengineering.co.jp)

**Banner Engineering Int'l Incorporated Taiwan Rep. Office** 8F-2, No. 308, Sec. 1, Neihu Rd. Taipei, Taiwan 114 Phone: +886 2 8751 9966 #15 | Fax: +886 2 8751 2966, [www.bannerengineering.com.tw](http://www.bannerengineering.com.tw), [info@bannerengineering.com.tw](mailto:info@bannerengineering.com.tw)

**Banner Engineering India** Pune Head Quarters Office, No. 1001 Sai Capital, Opp. ICC Senapati Bapat Road, Pune 411016 INDIA, Tel: 91-20-66405624, Fax: 91-20-66405623, [www.bannerengineering.co.in](http://www.bannerengineering.co.in), [india@bannerengineering.com](mailto:india@bannerengineering.com)



more sensors, more solutions