
# **ACP-2020**

## **2U Rackmount Short Depth Chassis for ATX and mATX Motherboard**



#### **Features**

- 398 mm short depth 2U rackmount chassis
- Supports ATX and mATX form factor single processor motherboard
- Two Internal 2.5" drive bay and two "hot-swap or external" drive bay
- Support 80 Plus single 350W or 500W redundant power supply
- Front-accessible system fan without opening top cover for easy maintenance
- Built-in Intelligent System Module enabling whole system fan control and remote manageability

#### C € FCC

#### **Specifications**


		External	Internal		
Drive Bay	Clies Ostisal Daiss	LAUGIIIdi	IIILEIIIdi		
	Slim Optical Drive	<u> </u>	·		
	2.5"	2 (hot-swap tray module as optional)*	2		
Cooling	Fan	1 (8 cm/41CFM)			
	Air Filter	Yes			
Front I/O Interface	USB 3.0*	2			
Miscellaneous	LED Indicators	Power, HDD, temperature, fan, LAN1, and LAN2			
	Rear Panel	Two 9-pin D-Sub			
Intelligent System Module Remote Monitoring	CPU/System fan speed, CPU/System temperature, motherboard voltage (Only selected Advantech MBs/CPU cards with SUSIAccess installed can fully enabled these functions, check with Advantech local rep. for detailed information.)				
Environment	,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	Operating	Non-Operating		
	Temperature	0 ~ 40° C (32 ~ 104° F)	-20 ~ 60° C (-4 ~ 140° F)		
	Humidity	10 ~ 85% @ 40° C, non-condensing 10 ~ 95% @ 60° C, non-condensing			
	Vibration (5 ~ 500 Hz)	1 Grms	2 G		
	Shock	10 G (with 11 ms duration, half sine wave)			
Physical Characteristics	Dimensions (W x H x D)	482 x 88 x 398 mm (18.96" x 3.46" x 15.67")			
	Weight	8.6 kg (18.96 lbs)			

- \* The USB 3.0 port do not operate if motherboard with no on-board USB 3.0 box header.
- \* ACP-2020 2.5" drive bay, both default internal and hot-swap tray module, support 2.5" HDD with thickness less than 14.7mm.
- $^{\star}$  The hot-swap module only accept 2.5" SATA HDD/SSD

#### **Front View**




#### **Rear View**






Optional SATA hot-swap tray module 98R1310010E



Internal 2.5" HDD x2 drive bays

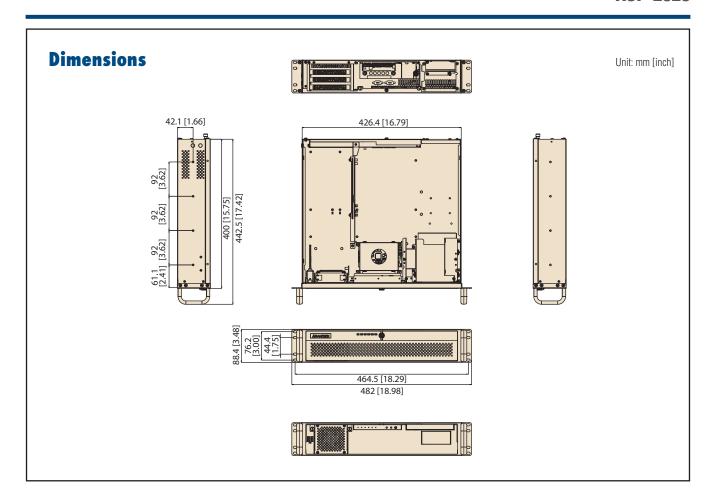

## **Ordering Information**

Part Number	Power supply	80 Plus grade	Power supply type	Wattage	Switch	
ACP-2020MB-35ZE	PS8-350FATX-XE	Bronze	Single	350W	ATX	
ACP-2020MB-50RF	RPS8-500U2-XF	Bronze	1+1 redundant	500W	ATX	

 $<sup>^\</sup>star$  Suggest to use CPU cooler 1960052651N021 , max. CPU TDP 84W under no add-on card configuration

### **Optional Accessories**

Part Number	Description		
96CB-SATAPOWER-6P2	SATA power wire 6-pin to big 4-pin (for slim ODD)		
1950014302N001	Special bracket for riser card AIMB-RP3P8-12A1E		
1990021407T000	Door filter		
98R1310010E	2.5" SATA Hot-swap module		