
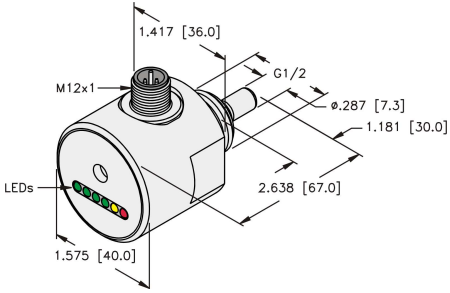


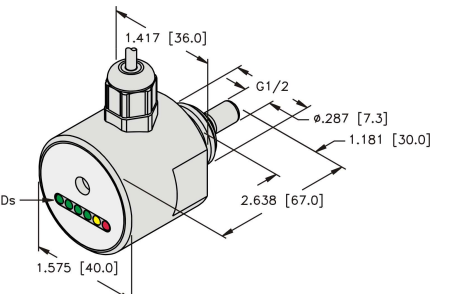

Housing Style	Part Number	ID Number	Flow Detection Range (water)	Flow Detection Range (oil)	Output
Self Contained Chemical Resistant, PVDF Housing 	FCS-G1/2DY-AP8X-H1141	M6870003	1-70 cm/sec.	2-100 cm/sec.	N.O. PNP
Self Contained Chemical Resistant, PVDF Housing 	FCS-G1/2DY-AP8X	M6870005	1-70 cm/sec.	2-100 cm/sec.	N.O. PNP

Technical data on pages B31-B34.
Accessories on page B73-B74.

Material

Housing	PVDF
Wetted Parts	PVDF

Voltage	Current Consumption (mA)	Switching Current /Analog Load	Pressure Rating (psi)	Fluid Connection	Operating Temp. (°C) (ambient)	Operating Temp. (°C) (fluid)	Protection	Mating Cord, Cable Length/Jacket	Wiring Diagram #	Wiring Diagrams
21.6-26.4 VDC	≤70 mA	≤400 mA	72	G 1/2	-25 to +70	-10 to +80	IP 67	RKK 4T-*	1	<div style="border: 1px solid black; padding: 5px; margin-bottom: 5px;"> <p style="text-align: center; background-color: #e0f2f1;">Diagram 1</p> </div> <div style="border: 1px solid black; padding: 5px;"> <p style="text-align: center; background-color: #e0f2f1;">Diagram 2</p> </div>
21.6-26.4 VDC	≤70 mA	≤400 mA	72	G 1/2	-25 to +70	-10 to +80	IP 67	2M/PTFE	2	

FLOW

* Length in meters.