

BALDOR® • *RELIANCE*

Product Information Packet

AOM3710T

7.5HP,1755RPM,3PH,60HZ,213T,3728M,TEAO,F

Copyright © All product information within this document is subject to Baldor Electric Company copyright © protection, unless otherwise noted.

Part Detail							
Revision:	D	Status:	PRD/A	Change #:		Proprietary:	No
Type:	AC	Prod. Type:	3728M	Elec. Spec:	37WGS141	CD Diagram:	
Enclosure:	TEAO	Mfg Plant:		Mech. Spec:	37F359	Layout:	
Frame:	213T	Mounting:	F1	Poles:	04	Created Date:	01-29-2007
Base:	RG	Rotation:	R	Insulation:	F	Eff. Date:	01-17-2012
Leads:	9#14 36" LONG	Literature:	Y	Elec. Diagram:		Replaced By:	

Nameplate NP1256L

CAT.NO.	AOM3710T						
SPEC.	37F359S141G1						
HP	7.5						
VOLTS	208-230/460						
AMP	23.5-21.8/10.9						
RPM	1755						
FRAME	213T	HZ	60	PH	3		
SER.F.	1.15	CODE	J	DES	A	CLASS	F
NEMA-NOM-EFF	87.5	PF	74				
RATING	40C AMB-CONT						
CC		USABLE AT 208V					
DE	6307	ODE	6206				
ENCL	TEAO	SN					
	1700 FPM AT 170CFM						

Parts List		
Part Number	Description	Quantity
SA153107	SA 37F359S141G1	1.000 EA
RA141852	RA 37F359S141G1	1.000 EA
HW3200A01	3/8-16X3/4 I-BLT WELDED F/S	1.000 EA
37CB3004	37 CB CASTING W/1.09 LEAD HOLE @ 6:00	1.000 EA
37GS1000SP	GASKET, CONDUIT BOX STD., .06 THICK LEXI	1.000 EA
10XN2520A10	1/4-20X 5/8 HEX HD X	2.000 EA
HW1001A25	LOCKWASHER 1/4, ZINC PLT .493 OD, .255 I	2.000 EA
11XW1032G06	10-32 X .38, TAPTITE II, HEX WSHR SLTD U	1.000 EA
37EP3101A02	FR ENDPLATE, 37L&M-TENV MTR, MACH	1.000 EA
HW4500A01	1641B(ALEMITE)400 UNIV, GREASE FITT	2.000 EA
HW5100A06	W2420-025 WVY WSHR (WB)	1.000 EA
37EP3100A09	PU ENDPLATE, MACH	1.000 EA
HW4500A01	1641B(ALEMITE)400 UNIV, GREASE FITT	1.000 EA
10XN2520A28	1/4-20X 1 3/4 HEX HD	4.000 EA
HW1001A25	LOCKWASHER 1/4, ZINC PLT .493 OD, .255 I	4.000 EA
XY3118A12	5/16-18 HEX NUT DIRECTIONAL SERRATION	4.000 EA
37CB4516	LIPPED LID FOR 37 FRAME NEC KOBX	1.000 EA
37GS1008SP	37 GS FOR CB LID - LEXIDE	1.000 EA
51XW0832A07	8-32 X .44, TAPTITE II, HEX WSHR SLTD SE	4.000 EA
HW2501F21	KEY, 5/16 SQ X 2.375	1.000 EA
HA7000A02	KEY RETAINER RING, 1 1/8 DIA, 1 3/8 DIA	1.000 EA
85XU0407S04	4X1/4 U DRIVE PIN STAINLESS	2.000 EA
LB1115	LABEL,LIFTING DEVICE	1.000 EA
MJ1000A75	GREASE, POLYREX EM EXXON	0.050 LB

Parts List (continued)		
Part Number	Description	Quantity
MG1000G27	PAINT- S9282E CHARCOAL GREY	0.028 GA
HA3104A14	THRUBOLT- 5/16-18 X12.125(OHIO)	4.000 EA
LB1125C01	STD (STOCK) CARTON LABEL BALDOR WITH FLA	1.000 EA
LC0005E01	CONN.DIA./WARNING LABEL (LC0005/LB1119)	1.000 EA
NP1256L	ALUM UL CSA CC	1.000 EA
36PA1001	PACKAGING GROUP	1.000 EA


Accessories		
Part Number	Description	Multiplier
37-3301	C FACE KIT	P1


Performance Data at 460V, 60Hz, 7.5HP (Typical performance - Not guaranteed values)

General Characteristics			
Full Load Torque:	22.4 LB-FT	Start Configuration:	DOL
No-Load Current:	6.5 Amps	Break-Down Torque:	75.4 LB-FT
Line-line Res. @ 25°C.:	1.39 Ohms A Ph / 0.0 Ohms B Ph	Pull-Up Torque:	43.9 LB-FT
Temp. Rise @ Rated Load:	75 C	Locked-Rotor Torque:	50.9 LB-FT
Temp. Rise @ S.F. Load:	92 C	Starting Current:	75.0 Amps


Load Characteristics							
% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor:	34.0	53.0	66.0	74.0	78.0	81.0	76.0
Efficiency:	76.0	84.4	86.9	87.4	87.0	86.0	87.2
Speed:	1790.0	1780.0	1769.0	1757.0	1744.0	1729.0	1749.0
Line Amperes:	6.8	7.75	9.16	10.9	12.9	15.1	12.1

Performance Graph at 460V, 60Hz, 7.5HP Typical performance - Not guaranteed values

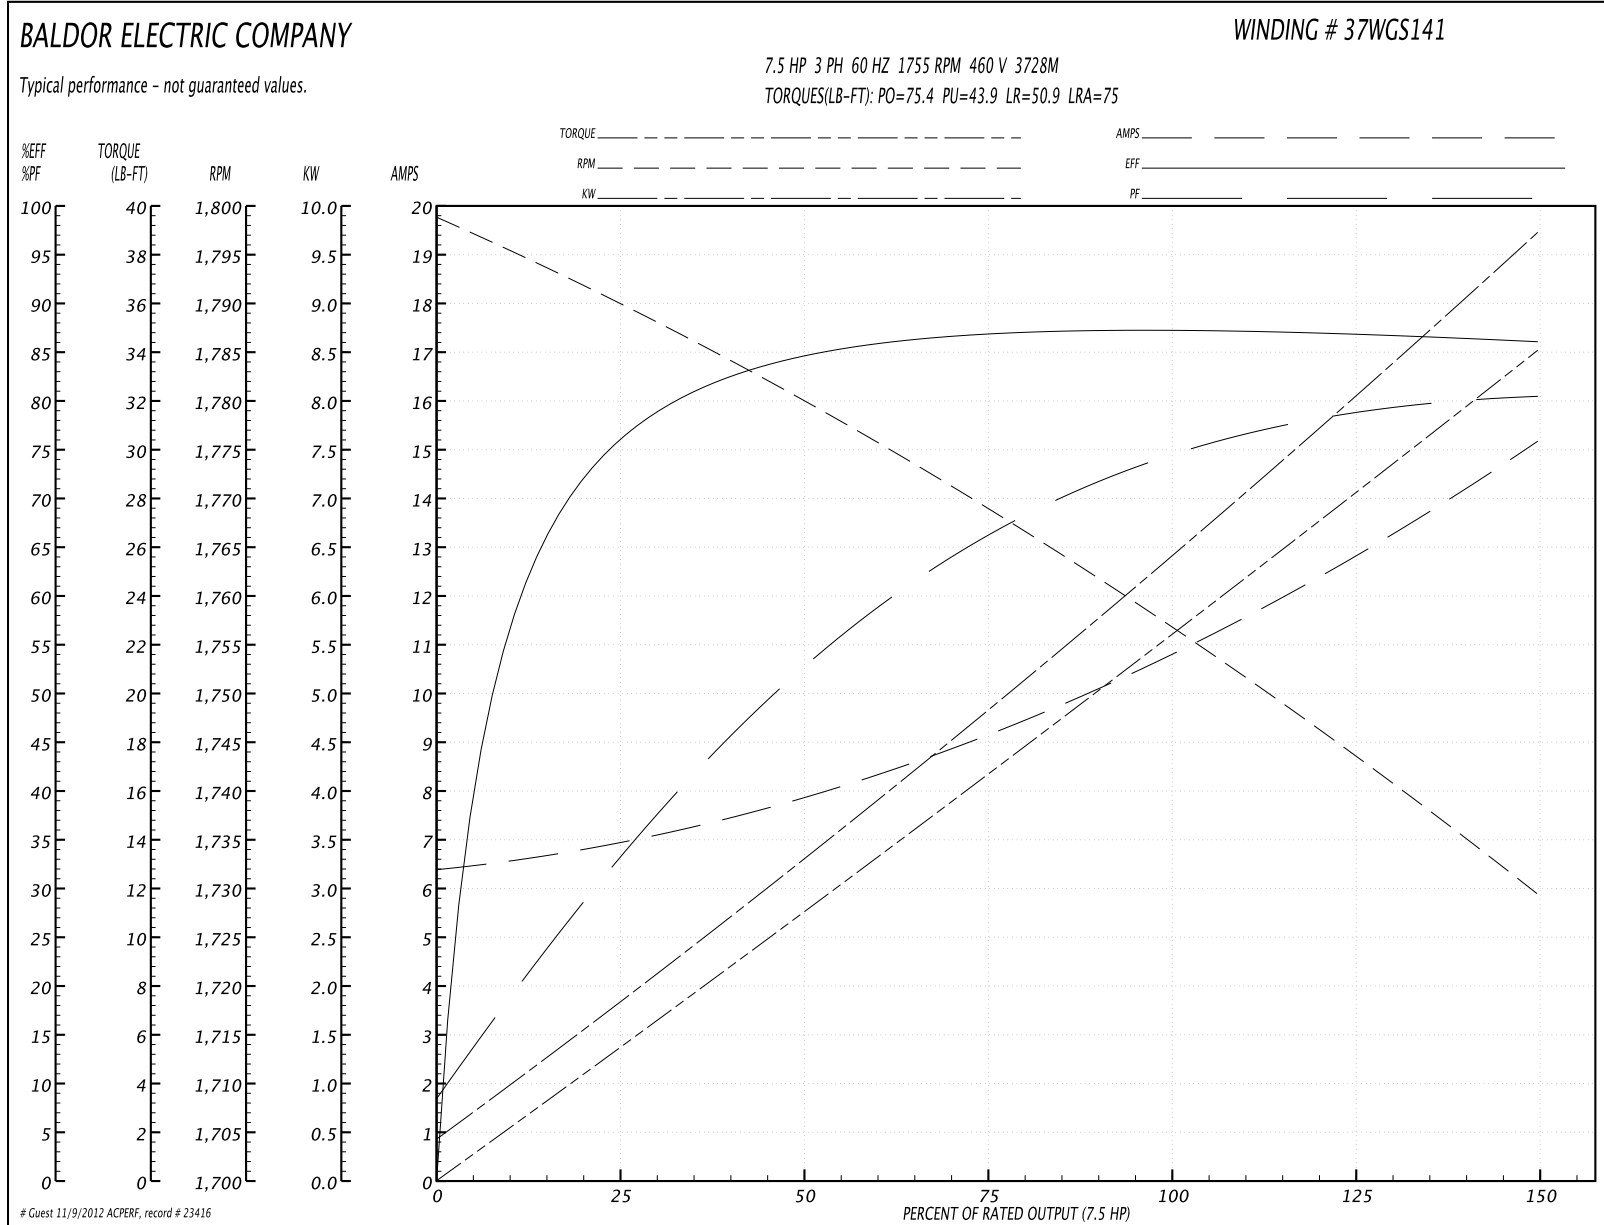


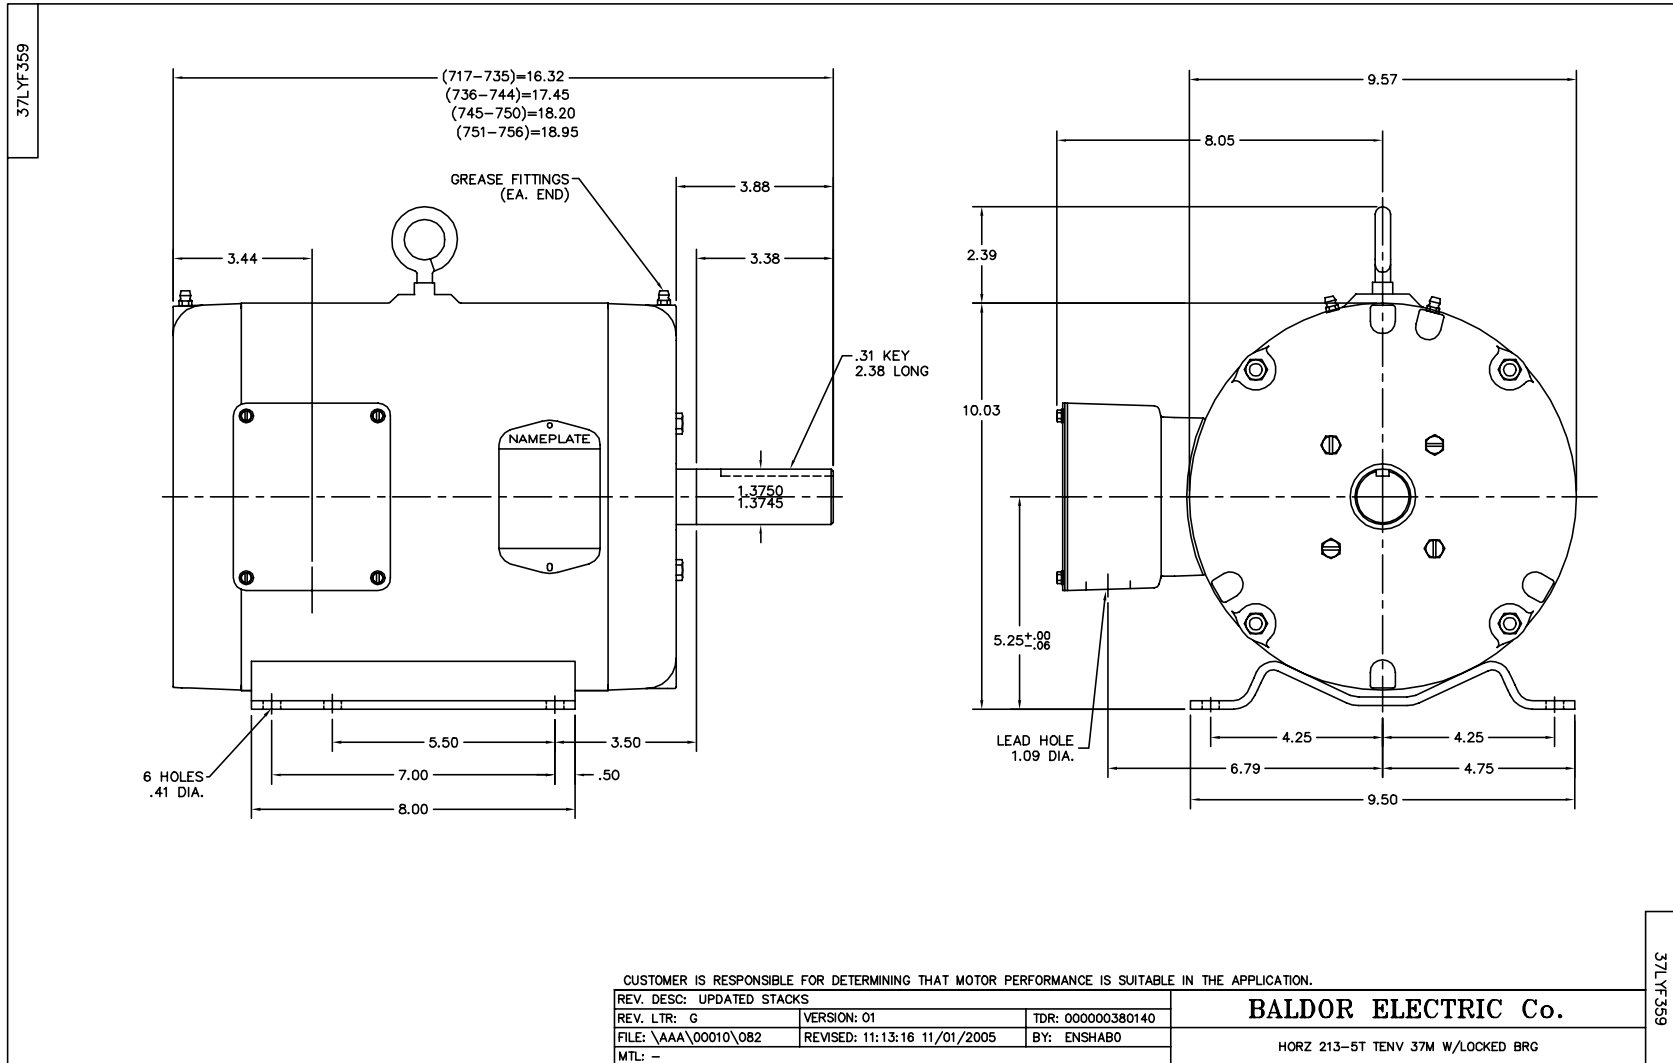

CD0005

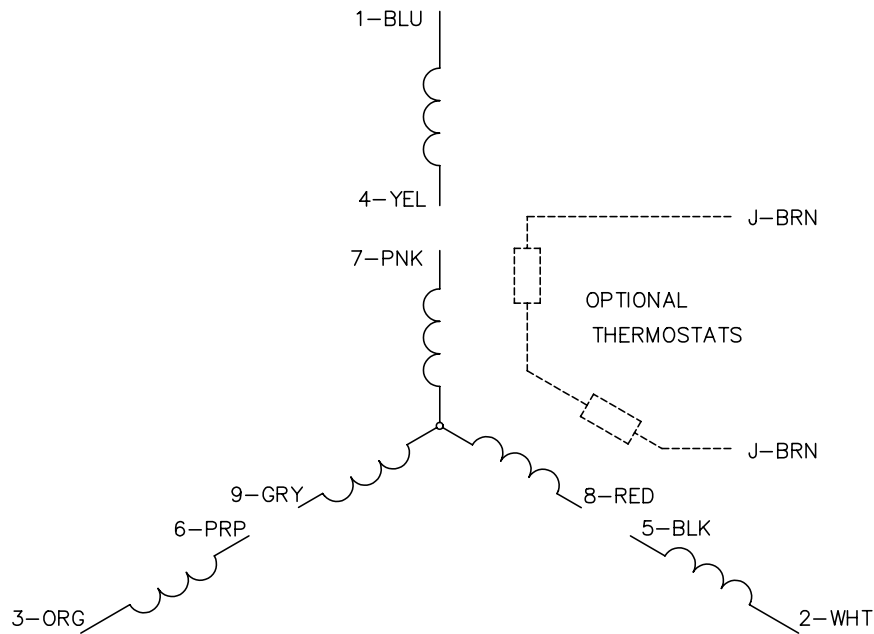


LOW VOLTAGE
(2Y)



LINE

HIGH VOLTAGE
(1Y)



LINE

NOTES:

1. INTERCHANGE ANY TWO LINE LEADS TO REVERSE ROTATION.
2. OPTIONAL THERMOSTATS ARE PROVIDED WHEN SPECIFIED.
3. ACTUAL NUMBER OF INTERNAL PARALLEL CIRCUITS MAY BE A MULTIPLE OF THOSE SHOWN ABOVE.
4. LEAD COLORS ARE OPTIONAL. LEADS MUST ALWAYS BE NUMBERED AS SHOWN.

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			
REV. LTR: E	BY: JLP	REVISED: 01/19/99 10:15	TDR: 0171435
900000		FILE: AAA00005140	MDL: -
		MTL: -	

BALDOR ELECTRIC Co.

3PH, DV, 9 LEADS

CD0005