

# **BALDOR® • RELIANCE**

## **Product Information Packet**

### **L1511T**

**10HP,3450RPM,1PH,60HZ,215T,3740L,OPEN,F1**

Copyright © All product information within this document is subject to Baldor Electric Company copyright © protection, unless otherwise noted.

Part Detail							
Revision:	A	Status:	PRD/A	Change #:		Proprietary:	No
Type:	AC	Prod. Type:	3740L	Elec. Spec:	37WGX047	CD Diagram:	
Enclosure:	OPEN	Mfg Plant:		Mech. Spec:	37K267	Layout:	
Frame:	215T	Mounting:	F1	Poles:	02	Created Date:	03-08-2007
Base:	RG	Rotation:	R	Insulation:	F	Eff. Date:	01-07-2010
Leads:	2#8 A PH,2#14 B PH	Literature:		Elec. Diagram:		Replaced By:	

Nameplate NP1256L									
CAT.NO.	L1511T								
SPEC.	37K267X047G1								
HP	10								
VOLTS	230								
AMP	46								
RPM	3450								
FRAME	215T	HZ			60	PH	1		
SER.F.	1.15	CODE			G	DES	L	CLASS	F
NEMA-NOM-EFF	83	PF			86				
RATING	40C AMB-CONT								
CC				USABLE AT 208V		48			
DE	6307	ODE			6206				
ENCL	OPEN	SN							

Parts List		
Part Number	Description	Quantity
SA155064	SA 37K267X047G1	1.000 EA
RA143721	RA 37K267X047G1	1.000 EA
HA6361A01	LIFTING LUG FOR 37, 39 & 40 FRAME (AUTOP	2.000 EA
37CB3006	37 CB CASTING W/1.38 LEAD HOLE @ 6:00	1.000 EA
51XW2520A12	.25-20 X .75, TAPTITE II, HEX WSHR SLTD	2.000 EA
11XW1032G06	10-32 X .38, TAPTITE II, HEX WSHR SLTD U	1.000 EA
37EP3200A01SP	FR ENDPLATE, 37L&M, OPEN, MACH, W/GREASE	1.000 EA
HW4500A01	1641B(ALEMITE)400 UNIV, GREASE FITT	1.000 EA
SP1008A01	BAFFLE, MODEL 36 & 37	1.000 EA
13XT0832A07	8-32X7/16 TYP 23 PAN HD SLT DX	2.000 EA
10XN2520A10	1/4-20X 5/8 HEX HD X	2.000 EA
HW1001A25	LOCKWASHER 1/4, ZINC PLT .493 OD, .255 I	2.000 EA
HW5100A06	W2420-025 WVY WSHR (WB)	1.000 EA
37EP3201A01	PU ENDPLATE, MACH 213-5T	1.000 EA
HW4500A01	1641B(ALEMITE)400 UNIV, GREASE FITT	1.000 EA
XY3118A12	5/16-18 HEX NUT DIRECTIONAL SERRATION	4.000 EA
37CB4516	LIPPED LID FOR 37 FRAME NEC KOBX	1.000 EA
51XW0832A07	8-32 X .44, TAPTITE II, HEX WSHR SLTD SE	4.000 EA
HW2501F21	KEY, 5/16 SQ X 2.375	1.000 EA
HA7000A02	KEY RETAINER RING, 1 1/8 DIA, 1 3/8 DIA	1.000 EA
85XU0407S04	4X1/4 U DRIVE PIN STAINLESS	2.000 EA
LB1115	LABEL,LIFTING DEVICE	1.000 EA
MJ1000A75	GREASE, POLYREX EM EXXON	0.050 LB
MG1000G27	PAINT- S9282E CHARCOAL GREY	0.028 GA

Parts List (continued)		
Part Number	Description	Quantity
37CB5007A01	CAPACITOR BOX KIT, 37CB3802, 3 EC1216C0	1.000 EA
SP5172A01	37 TYPE L TORQ STAT SWITCH LEAD ASSEMBLY	1.000 EA
HA3104A35	THRUBOLT .31-18 X 13.687	4.000 EA
LB1119	WARNING LABEL	1.000 EA
LB1125C01	STD (STOCK) CARTON LABEL BALDOR WITH FLA	1.000 EA
LC0017	CONN LABEL-1 PHASE-SINGLE VOLT-REV ROTNO	1.000 EA
NP1256L	ALUM UL CSA CC	1.000 EA
36PA1001	PACKAGING GROUP	1.000 EA


Accessories		
Part Number	Description	Multiplier
37-1404	C FACE KIT	A8

**Performance Data at 230V, 60Hz, 10.0HP (Typical performance - Not guaranteed values)**


General Characteristics			
Full Load Torque:	15.0 LB-FT	Start Configuration:	DOL
No-Load Current:	19.3 Amps	Break-Down Torque:	46.4 LB-FT
Line-line Res. @ 25°C.:	0.163 Ohms A Ph / 0.728 Ohms B Ph	Pull-Up Torque:	27.6 LB-FT
Temp. Rise @ Rated Load:	100 C	Locked-Rotor Torque:	30.6 LB-FT
Temp. Rise @ S.F. Load:	115 C	Starting Current:	280.0 Amps

Load Characteristics							
% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor:	56.0	72.0	82.0	86.0	88.0	87.0	87.0
Efficiency:	63.0	79.3	81.1	83.7	82.8	80.7	83.2
Speed:	3587.0	3570.0	3552.0	3536.0	3512.0	3482.0	3522.0
Line Amperes:	23.5	29.0	37.2	45.5	55.6	68.6	51.6

Performance Graph at 230V, 60Hz, 10.0HP Typical performance - Not guaranteed values

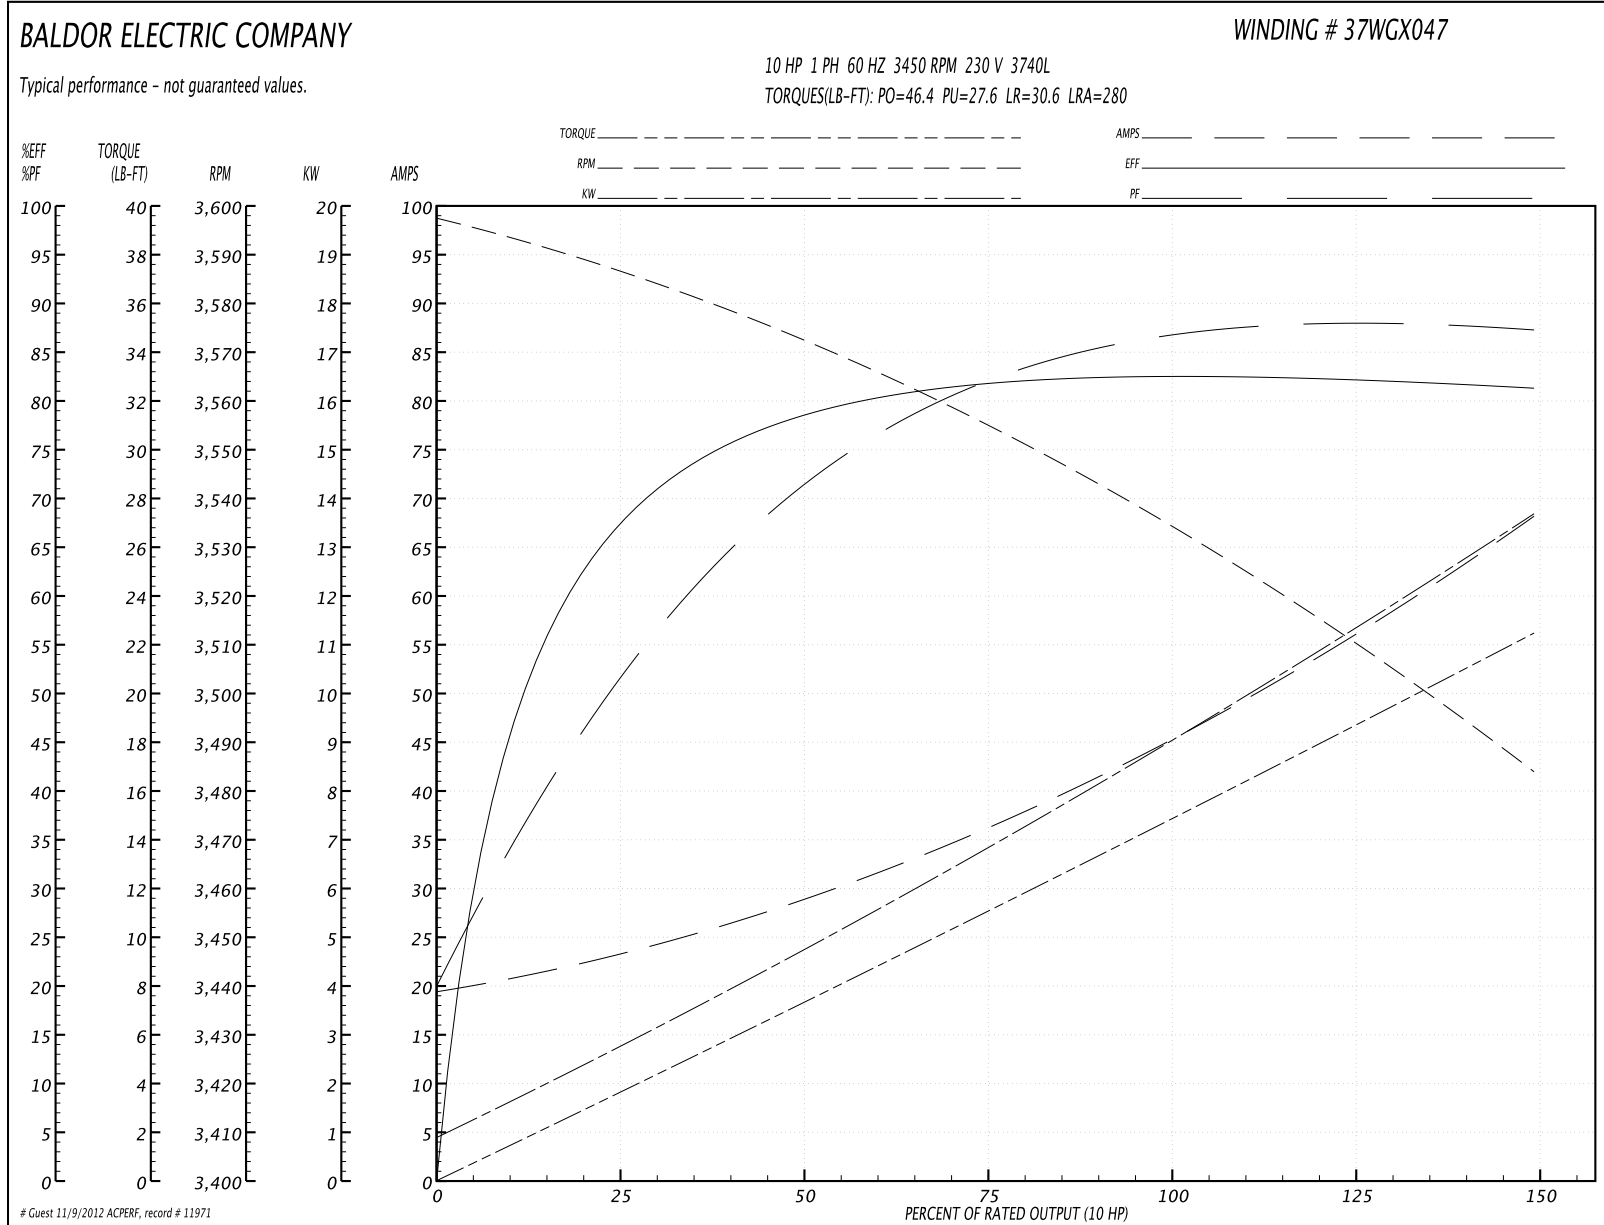

37LYK267

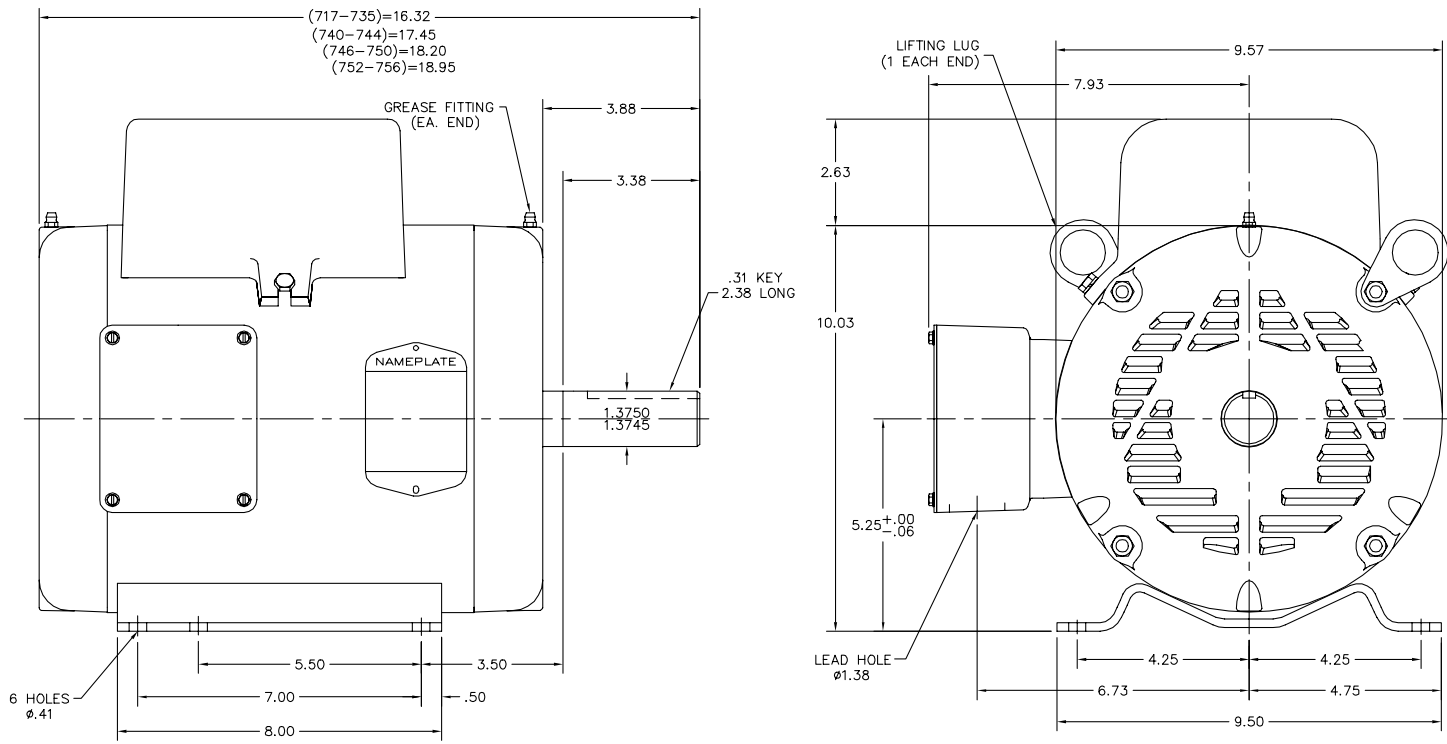

CUSTOMER IS RESPONSIBLE FOR DETERMINING THAT MOTOR PERFORMANCE IS SUITABLE IN THE APPLICATION.


REV. DESC: NEW	VERSION: 00	TDR: 000000423526
REV. LTR: -	REVISED: 14:48:02 03/08/2007	BY: ENJASF0
FILE: \AAA\00144\941		
MTL: -		

**BALDOR ELECTRIC Co.**  
STANDARD HORZ NEMA 213T-215T OPEN 37L-LC, TORX SWITCH

37LYK267



CD0017A01

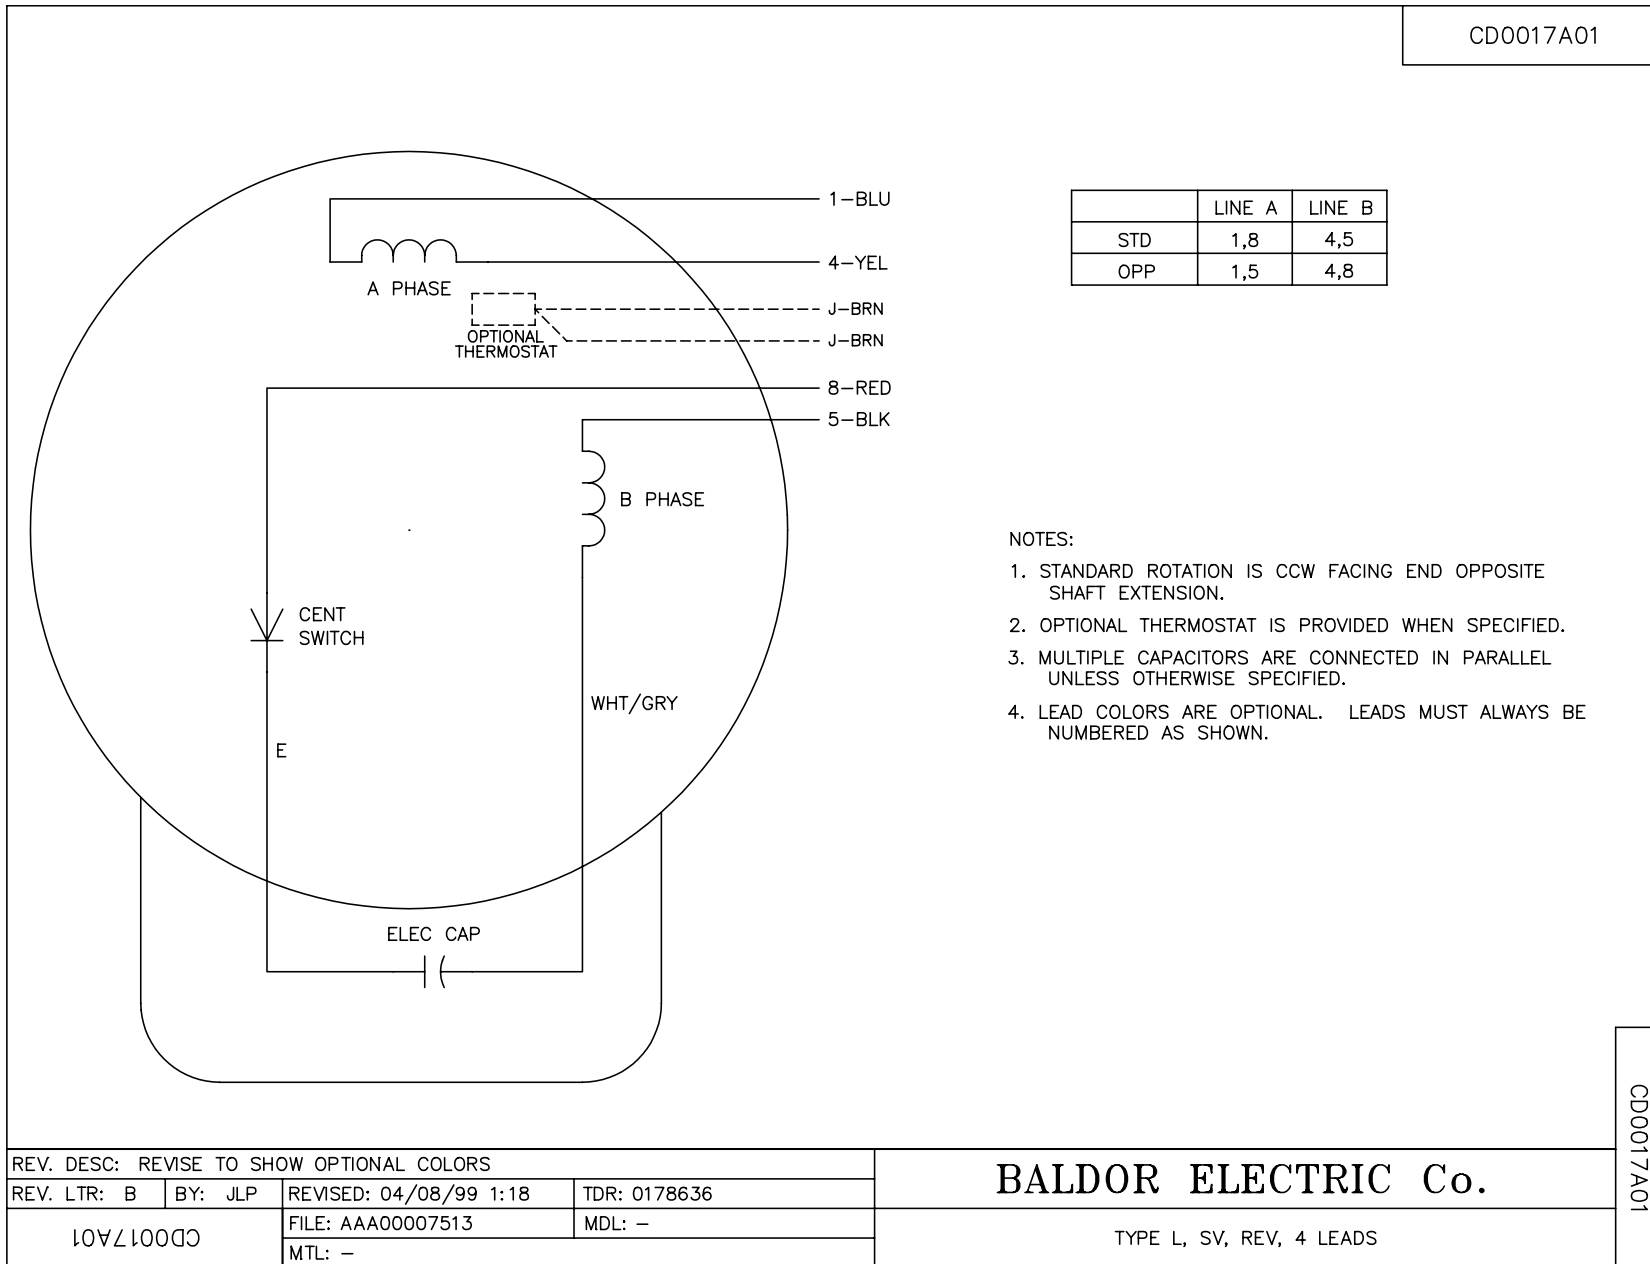

REV. DESC: REVISE TO SHOW OPTIONAL COLORS			
REV. LTR: B	BY: JLP	REVISED: 04/08/99 1:18	TDR: 0178636
10VZ10000		FILE: AAA00007513	MDL: -
CD0017A01		MTL: -	

**BALDOR ELECTRIC Co.**

TYPE L, SV, REV, 4 LEADS

CD0017A01