

BALDOR® • RELIANCE

Product Information Packet

M1729T

25/11HP, 1760/1160RPM, 3PH, 60HZ, 324T, 1240M

Copyright © All product information within this document is subject to Baldor Electric Company copyright © protection, unless otherwise noted.

Part Detail							
Revision:	K	Status:	PRD/A	Change #:		Proprietary:	No
Type:	AC	Prod. Type:	1240M	Elec. Spec:	12WGX260	CD Diagram:	
Enclosure:	TEFC	Mfg Plant:		Mech. Spec:	12C51	Layout:	
Frame:	324T	Mounting:	F1	Poles:	04/06	Created Date:	
Base:	RG	Rotation:	R	Insulation:	F	Eff. Date:	02-26-2010
Leads:	6#10	Literature:		Elec. Diagram:		Replaced By:	

Nameplate NP1256L									
CAT.NO.	M1729T								
SPEC.	12C051X260G1								
HP	25/11								
VOLTS	460								
AMP	30/18								
RPM	1760/1160								
FRAME	324T	HZ	60	PH	3				
SER.F.	1.15	CODE	H	DES	B	CLASS	F		
NEMA-NOM-EFF		PF							
RATING	40C AMB-CONT								
CC		USABLE AT 208V							
DE	6312	ODE	6311						
ENCL	TEFC	SN							

Parts List		
Part Number	Description	Quantity
SA062947	SA 12C051X260G1	1.000 EA
RA057165	RA 12C051X260G1	1.000 EA
10CB3001	CONDUIT BOX CAST W/2.500 LEAD HOLE	1.000 EA
12GS1000SP	GASKET	1.000 EA
10XN3118K12	5/16-18 X .75 GRADE 5, ZINC PLATED	4.000 EA
HW1001A31	LOCKWASHER 5/16, ZINC PLT.591 OD, .319 I	4.000 EA
WD1000B16	KPA-4C BURNDY TERMINAL	1.000 EA
51XF2520A08	SCREW, HEX SER SLT HD, ZN 1/4-20 X .50 L	1.000 EA
HA4051A00	PLASTIC CAP FOR GREASE FITTING	1.000 EA
10FN3001A02	310 FAN, PLASTIC 2.000 DIA. BORE	1.000 EA
HW2500A25	WOODRUFF KEY USA #1008 #BLOW CARBON STEE	1.000 EA
HA6390A01	HOSE CLAMP FOR 3.12 DIA S.S. OR PLATED	1.000 EA
HA3400A13SP	STUD, 1/2-13 X 7" WELKER	4.000 EA
HW1001A50	LOCKWASHER 1/2, ZINC PLT,.879 OD, .509 I	4.000 EA
12FH1002SP	FAN COVER, CAST QF,WAUPACA QUALITY	1.000 EA
HW5100A13	W4627-047 WVY WSHER	1.000 EA
10XN3118K36	5/16-18 X 2.25" HEX HD, GRADE 5	2.000 EA
HW1001A31	LOCKWASHER 5/16, ZINC PLT.591 OD, .319 I	2.000 EA
10XN3118K40	5/16-18 X 2.50" HEX HD, GRADE 5	4.000 EA
HW1001A31	LOCKWASHER 5/16, ZINC PLT.591 OD, .319 I	4.000 EA
12EP1106A01	PU ENDPLATE, MACH 324-6T	1.000 EA
HA4051A00	PLASTIC CAP FOR GREASE FITTING	1.000 EA
10XN5013K28	1/2-13 X 1.75 HEX HEAD MACH SCREW,GRAD	4.000 EA
HW1001A50	LOCKWASHER 1/2, ZINC PLT,.879 OD, .509 I	4.000 EA


Parts List (continued)		
Part Number	Description	Quantity
HW1001A50	LOCKWASHER 1/2, ZINC PLT, .879 OD, .509 I	4.000 EA
XY5013A12	NUT, 1/2-13, HEX, STEEL, ZINCPLATED	4.000 EA
10CB3500SP	CONDUIT BOX LID, CAST	1.000 EA
10GS1000SP	GASKET, CONDUIT BOX LID	1.000 EA
51XW2520A12	.25-20 X .75, TAPTITE II, HEX WSHR SLTD	4.000 EA
HW4600B41	V-RING SLINGER 2.125 X 2.880 X 0.280	1.000 EA
HW2501H33	KEY, 1/2 SQ X 3.875	1.000 EA
LB1115	LABEL, LIFTING DEVICE	1.000 EA
12EP1107A05	FR ENDPLATE, MACH 324-6T	1.000 EA
HW4500A21	1618BALEMITE FITTING 825 UNIVERSAL	1.000 EA
HW4500A17	317400 ALEMITE GREASE RELIEF	1.000 EA
HA4001A01SP	DRAIN PLUG, PLASTIC (MICRO PLAS)	1.000 EA
MJ1000A75	GREASE, POLYREX EM EXXON	0.200 LB
HW4500A03	GREASE FITTING, .125 NPT 1610(ALEMITE) 8	1.000 EA
HW4500A17	317400 ALEMITE GREASE RELIEF	1.000 EA
HA4001A01SP	DRAIN PLUG, PLASTIC (MICRO PLAS)	1.000 EA
MG1000G27	PAINT- S9282E CHARCOAL GREY	0.080 GA
85XU0407A04	#4-7 X 1/4 DRIVE PIN	2.000 EA
LB5040	INSTRUCTION TAG, AC & DC	1.000 EA
LB1125C01	STD (STOCK) CARTON LABEL BALDOR WITH FLA	2.000 EA
LB1119	WARNING LABEL	1.000 EA
LC0013	CONNECTION LABEL	1.000 EA
NP1256L	ALUM UL CSA CC	1.000 EA
12PA1000	PACKAGING GROUP COMBINED PRINT PK1024A06	1.000 EA

Accessories		
Part Number	Description	Multiplier
12-1105	C FACE KIT	A8
12EP1501A03SP	D-FLANGE KIT	A8

Performance Data at 460V, 60Hz, 25.0HP (Typical performance - Not guaranteed values)

General Characteristics							
Full Load Torque:	74.0 LB-FT			Start Configuration:	DOL		
No-Load Current:	10.9 Amps			Break-Down Torque:	185.0 LB-FT		
Line-line Res. @ 25°C.:	0.597 Ohms A Ph / 0.0 Ohms B Ph			Pull-Up Torque:	86.0 LB-FT		
Temp. Rise @ Rated Load:	71 C			Locked-Rotor Torque:	115.0 LB-FT		
Temp. Rise @ S.F. Load:	83 C			Starting Current:	189.0 Amps		
Load Characteristics							
% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor:	55.0	76.0	84.0	87.0	58.0	90.0	70.0
Efficiency:	81.1	87.6	89.4	89.8	89.5	88.0	89.6
Speed:	1795.0	1791.0	1785.0	1780.0	1775.0	1768.0	1777.0
Line Amperes:	13.2	17.7	23.4	30.0	56.7	44.3	46.0

Performance Graph at 460V, 60Hz, 25.0HP Typical performance - Not guaranteed values

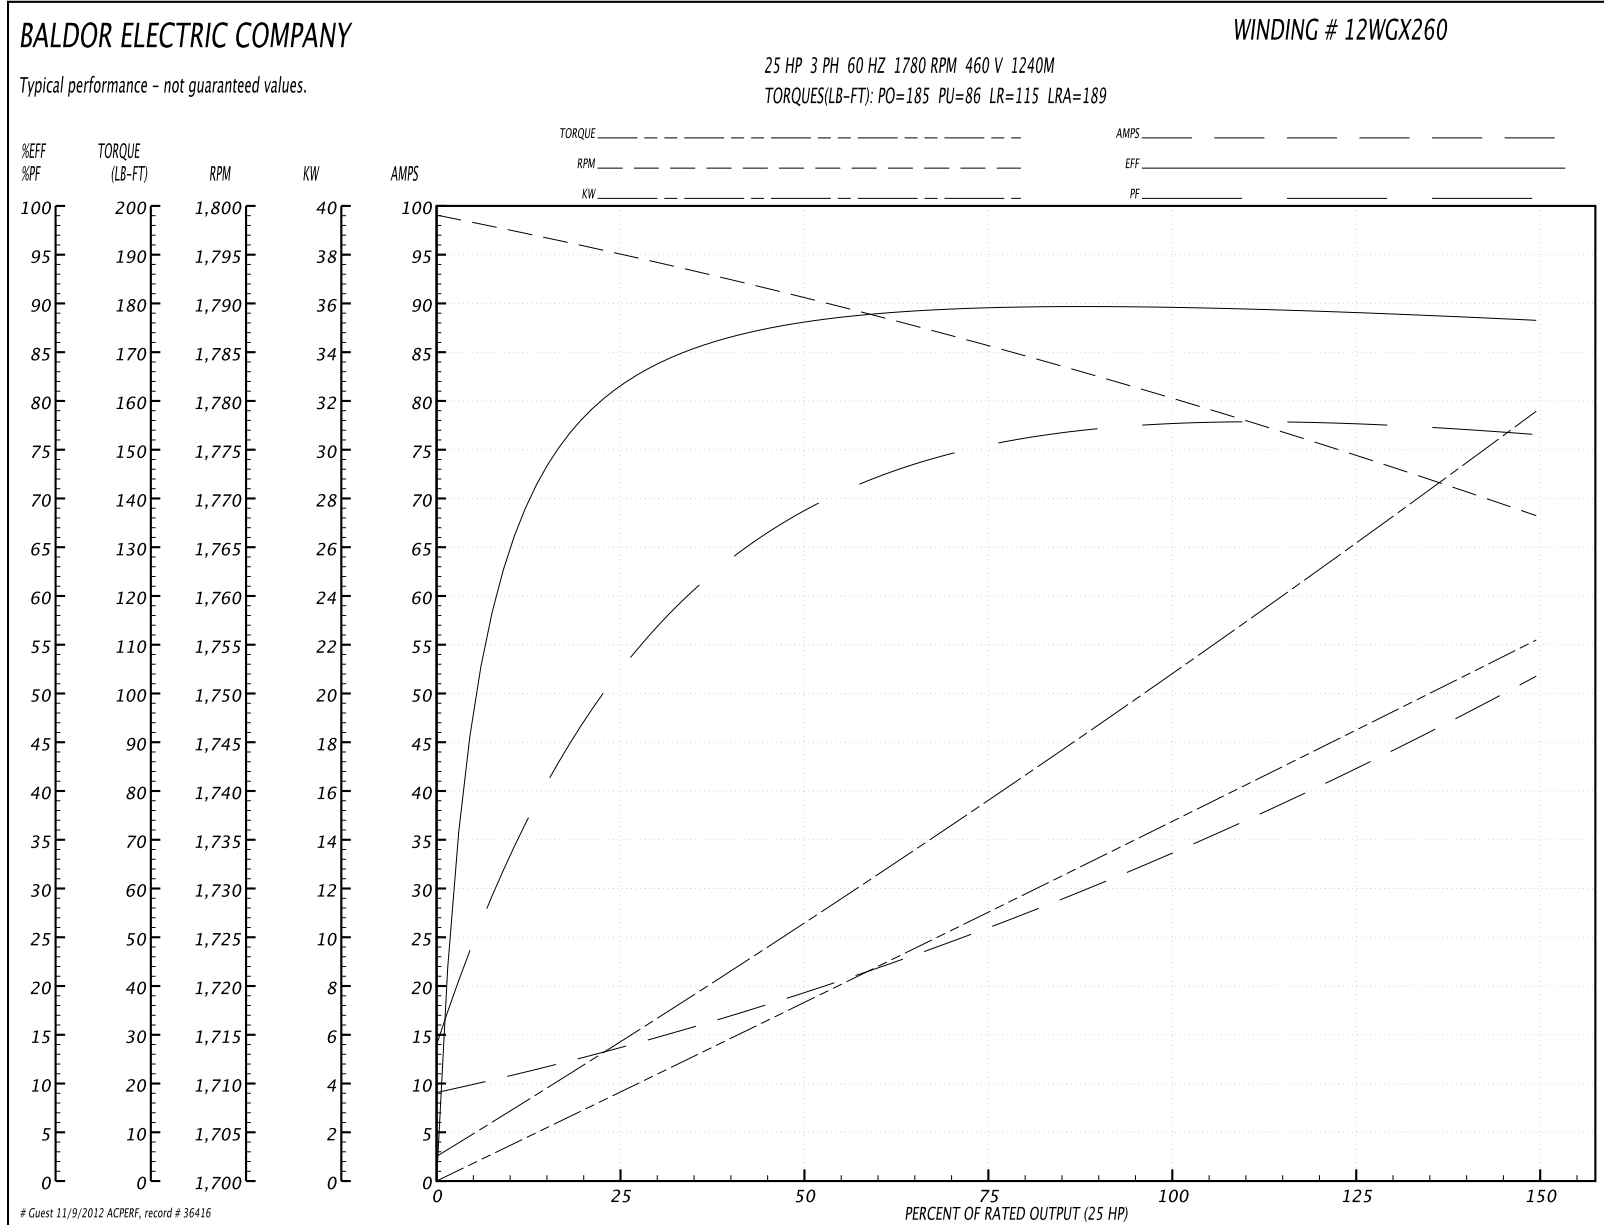

Performance Data at 460V, 60Hz, 11.0HP (Typical performance - Not guaranteed values)

General Characteristics			
Full Load Torque:	50.0 LB-FT	Start Configuration:	DOL
No-Load Current:	12.3 Amps	Break-Down Torque:	143.0 LB-FT
Line-line Res. @ 25°C.:	0.921 Ohms A Ph / 0.0 Ohms B Ph	Pull-Up Torque:	50.0 LB-FT
Temp. Rise @ Rated Load:	55 C	Locked-Rotor Torque:	75.0 LB-FT
Temp. Rise @ S.F. Load:	63 C	Starting Current:	96.0 Amps

Load Characteristics							
% of Rated Load	25	50	75	100	125	150	S.F.
Power Factor:	24.0	43.0	57.0	66.0	74.0	78.0	71.0
Efficiency:	83.7	87.1	88.5	89.1	89.1	88.9	89.1
Speed:	1197.0	1196.0	1193.0	1191.0	1188.0	1186.0	1189.0
Line Amperes:	13.3	14.3	15.9	18.0	20.0	23.0	19.2

Performance Graph at 460V, 60Hz, 11.0HP Typical performance - Not guaranteed values

